

# CHIPSEC

version 2.0.1



Platform Security Assessment Framework

February 13, 2026

# Contents

<b>Contact</b>	<b>1</b>
<b>Download CHIPSEC</b>	<b>2</b>
GitHub repository	2
Releases	2
Python	2
<b>Installation</b>	<b>3</b>
Linux Installation	3
Creating a Live Linux image	3
Installing Kali Linux	3
Prerequisites	3
Installing CHIPSEC	4
Building CHIPSEC	4
Run CHIPSEC	4
DAL Windows Installation	5
Prerequisites	5
Building	5
Windows Installation	5
Install CHIPSEC Dependencies	5
Building	6
Turn off kernel driver signature checks	6
Alternate Build Methods	7
Windows PCI Filter Driver	8
Install PCI Filter Driver	9
Filter Driver Access PCI Config Space Test	11
Building a Bootable USB drive with UEFI Shell (x64)	12
Installing CHIPSEC	12
Run CHIPSEC in UEFI Shell	12
Building UEFI Python 3.6.8 (optional)	13
<b>Using CHIPSEC</b>	<b>13</b>
Interpreting results	13
Results	14
Automated Tests	14
Tools	17
Running CHIPSEC	17
Running in Shell	18
Using as a Python Package	18
chipsec_main options	19
chipsec_util options	19
Windows Exception Errors	19

STATUS_PRIVILEGED_INSTRUCTION (0xC0000096)	19
Windows driver: StartService error	21
Additional details	22
<b>Module &amp; Command Development</b>	<b>22</b>
Architecture Overview	22
Core components	22
Commands	23
chipsec.utilcmd package	23
chipsec.utilcmd.acpi_cmd module	23
chipsec.utilcmd.chipset_cmd module	23
chipsec.utilcmd.cmos_cmd module	24
chipsec.utilcmd.config_cmd module	24
chipsec.utilcmd.cpu_cmd module	24
chipsec.utilcmd.decode_cmd module	24
chipsec.utilcmd.deltas_cmd module	24
chipsec.utilcmd.desc_cmd module	24
chipsec.utilcmd.ec_cmd module	25
chipsec.utilcmd.hals_cmd module	25
chipsec.utilcmd.igd_cmd module	25
chipsec.utilcmd.interrupts_cmd module	26
chipsec.utilcmd.io_cmd module	26
chipsec.utilcmd.iommu_cmd module	26
chipsec.utilcmd.lock_check_cmd module	27
chipsec.utilcmd.mem_cmd module	27
chipsec.utilcmd.mm_msgbus_cmd module	27
chipsec.utilcmd.mmcfg_base_cmd module	28
chipsec.utilcmd.mmcfg_cmd module	28
chipsec.utilcmd.mmio_cmd module	28
chipsec.utilcmd.module_id_cmd module	28
chipsec.utilcmd.msgbus_cmd module	29
chipsec.utilcmd.msr_cmd module	29
chipsec.utilcmd.pci_cmd module	29
chipsec.utilcmd.reg_cmd module	30
chipsec.utilcmd.smbios_cmd module	30
chipsec.utilcmd.smbus_cmd module	30
chipsec.utilcmd.spd_cmd module	30
chipsec.utilcmd.spi_cmd module	31
chipsec.utilcmd.spidesc_cmd module	31
chipsec.utilcmd.tpm_cmd module	31
chipsec.utilcmd.txt_cmd module	32
chipsec.utilcmd.unicode_cmd module	32

chipsec.utilcmd.uefi_cmd module	32
chipsec.utilcmd.vmem_cmd module	32
chipsec.utilcmd.vmm_cmd module	33
HAL (Hardware Abstraction Layer)	33
chipsec.hal package	33
chipsec.hal.hal_base module	33
chipsec.hal.hals module	33
Fuzzing	33
chipsec.fuzzing package	33
chipsec.fuzzing.primitives module	33
CHIPSEC_MAIN Program Flow	33
CHIPSEC_UTIL Program Flow	34
Auxiliary components	34
Executable build scripts	34
Configuration Files	34
Configuration File Example	35
List of Cfg components	35
Writing Your Own Modules	38
OS Helpers and Drivers	39
Mostly invoked by HAL modules	39
Helpers import from BaseHelper	39
Create a New Helper	40
Example	40
Helper components	40
chipsec.helper package	40
chipsec.helper.dal package	40
chipsec.helper.dal.dalhelper module	40
chipsec.helper.efi package	40
chipsec.helper.efi.efihelper module	40
chipsec.helper.linux package	41
chipsec.helper.linux.linuxhelper module	41
chipsec.helper.linuxnative package	41
chipsec.helper.linuxnative.cpuuid module	41
chipsec.helper.linuxnative.legacy_pci module	41
chipsec.helper.linuxnative.linuxnativehelper module	41
chipsec.helper.windows package	41
chipsec.helper.windows.windowshelper module	41
chipsec.helper.basehelper module	41
chipsec.helper.nonehelper module	41
chipsec.helper.oshelper module	41
Methods for Platform Detection	42

Uses PCI VendorID and DeviceID to detect processor and PCH	42
Chip information located in <code>chipsec/chipset.py</code>	42
Platform Configuration Options	42
Sample module code template	42
Util Command	43
CHIPSEC Modules	43
Modules	48
chipsec.modules package	48
chipsec.modules.bdw package	48
chipsec.modules.byt package	48
chipsec.modules.common package	48
chipsec.modules.common.cpu package	48
chipsec.modules.common.cpu.cpu_info module	48
chipsec.modules.common.cpu.ia_untrusted module	48
chipsec.modules.common.cpu.spectre_v2 module	49
chipsec.modules.common.secureboot package	50
chipsec.modules.common.secureboot.variables module	50
chipsec.modules.common.uefi package	51
chipsec.modules.common.uefi.access_ufispec module	51
chipsec.modules.common.uefi.s3bootscript module	51
chipsec.modules.common.bios_kbrd_buffer module	52
chipsec.modules.common.bios_smi module	52
chipsec.modules.common.bios_ts module	53
chipsec.modules.common.bios_wp module	53
chipsec.modules.common.cet module	54
chipsec.modules.common.debugenabled module	54
chipsec.modules.common.ia32cfg module	55
chipsec.modules.common.me_mfg_mode module	55
chipsec.modules.common.memconfig module	56
chipsec.modules.common.memlock module	56
chipsec.modules.common.remap module	57
chipsec.modules.common.rom_armor module	58
chipsec.modules.common.rtclock module	58
chipsec.modules.common.sgx_check module	58
chipsec.modules.common.sgx_check_sidekick module	59
chipsec.modules.common.smm module	59
chipsec.modules.common.smm_addr module	60
chipsec.modules.common.smm_close module	60
chipsec.modules.common.smm_code_chk module	60
chipsec.modules.common.smm_dma module	61
chipsec.modules.common.smm_lock module	61

chipsec.modules.common.smrr module	62
chipsec.modules.common.spd_wd module	62
chipsec.modules.common.spi_access module	63
chipsec.modules.common.spi_desc module	63
chipsec.modules.common.spi_fdopss module	64
chipsec.modules.common.spi_lock module	64
chipsec.modules.tools package	65
chipsec.modules.tools.cpu package	65
chipsec.modules.tools.cpu.sinkhole module	65
chipsec.modules.tools.secureboot package	65
chipsec.modules.tools.secureboot.te module	65
chipsec.modules.tools.smm package	66
chipsec.modules.tools.smm.rogue_mmio_bar module	66
chipsec.modules.tools.smm.smm_ptr module	66
chipsec.modules.tools.uefi package	67
chipsec.modules.tools.uefi.reputation module	67
chipsec.modules.tools.uefi.s3script_modify module	67
chipsec.modules.tools.uefi.scan_blocked module	69
chipsec.modules.tools.uefi.scan_image module	69
chipsec.modules.tools.uefi.uefivar_fuzz module	69
chipsec.modules.tools.vmm package	70
chipsec.modules.tools.vmm.hv package	70
chipsec.modules.tools.vmm.hv.define module	70
chipsec.modules.tools.vmm.hv.hypercall module	70
chipsec.modules.tools.vmm.hv.hypercallfuzz module	70
chipsec.modules.tools.vmm.hv.synth_dev module	71
chipsec.modules.tools.vmm.hv.synth_kbd module	71
chipsec.modules.tools.vmm.hv.vmbus module	71
chipsec.modules.tools.vmm.hv.vmbusfuzz module	71
chipsec.modules.tools.vmm.vbox package	71
chipsec.modules.tools.vmm.vbox.vbox_crash_apicbase module	71
chipsec.modules.tools.vmm.xen package	71
chipsec.modules.tools.vmm.xen.define module	71
chipsec.modules.tools.vmm.xen.hypercall module	72
chipsec.modules.tools.vmm.xen.hypercallfuzz module	72
chipsec.modules.tools.vmm.xen.xsa188 module	72
chipsec.modules.tools.vmm.cpuid_fuzz module	72
chipsec.modules.tools.vmm.ept_finder module	73
chipsec.modules.tools.vmm.hypercallfuzz module	74
chipsec.modules.tools.vmm.iofuzz module	74
chipsec.modules.tools.vmm.msrfuzz module	75

chipsec.modules.tools.vmm.pcie_fuzz module	76
chipsec.modules.tools.vmm.pcie_overlap_fuzz module	77
chipsec.modules.tools.vmm.venom module	77
chipsec.modules.tools.wsmt module	77
<b>Contribution and Style Guides</b>	<b>78</b>
Python Version	78
Python Coding Style Guide	78
f-Strings	81
Type Hints	81
Underscores in Numeric Literals	83
Walrus Operator (:=)	83
Deprecate distutils module support	84
Sphinx Version	84
Generating Documentation	84
References	85





CHIPSEC is a framework for analyzing platform level security of hardware, devices, system firmware, low-level protection mechanisms, and the configuration of various platform components.

It contains a set of modules, including simple tests for hardware protections and correct configuration, tests for vulnerabilities in firmware and platform components, security assessment and fuzzing tools for various platform devices and interfaces, and tools acquiring critical firmware and device artifacts.

CHIPSEC can run on *Windows*, *Linux*, and *UEFI shell*.

### Warning

Chipsec should only be used on test systems!

It should not be installed/deployed on production end-user systems.

There are multiple reasons for that:

1. Chipsec kernel drivers provide direct access to hardware resources to user-mode applications (for example, access to physical memory). When installed on production systems this could allow malware to access privileged hardware resources.
2. The driver is distributed as source code. In order to load it on Operating System which requires kernel drivers to be signed (for example, 64 bit versions of Microsoft Windows 7 and higher), it is necessary to enable TestSigning (or equivalent) mode and sign the driver executable with test signature. Enabling TestSigning (or equivalent) mode turns off an important OS kernel protection and should not be done on production systems.
3. Due to the nature of access to hardware, if any chipsec module issues incorrect access to hardware resources, Operating System can hang or panic.

## Contact

For any questions or suggestions please contact us at: [chipsec@intel.com](mailto:chipsec@intel.com)

We also have the [issue tracker](#) in our GitHub repo. If you'd like to report a bug or make a request please open an issue.

If you'd like to make a contribution to the code please open a [pull request](#)

Mailing list:

- Site: <https://lists.linux.dev/>
- Name: oe-chipsec
- List Address: [oe-chipsec@lists.linux.dev](mailto:oe-chipsec@lists.linux.dev)
- Archive Site: <https://lore.kernel.org/oe-chipsec/>

If you wish to subscribe, please send an email to: [oe-chipsec+subscribe@lists.linux.dev](mailto:oe-chipsec+subscribe@lists.linux.dev)

Twitter:

- For CHIPSEC release alerts: Follow [CHIPSEC Release](#)

## 2 - Download CHIPSEC

- For general CHIPSEC info: Follow [CHIPSEC](#)

Discord:

- *CHIPSEC Discord Server* <<https://discord.gg/NvxdPe8RKt>>

### Note

For **AMD** related questions or suggestions please contact Gabriel Kerneis at:  
[Gabriel.Kerneis@ssi.gouv.fr](mailto:Gabriel.Kerneis@ssi.gouv.fr)

## Download CHIPSEC

### GitHub repository

CHIPSEC source files are maintained in a GitHub repository:

GitHub Repo

### Releases

You can find the latest release here:

Latest Release

Archived releases can be found [here](#)

After downloading there are some steps to follow to build the driver and run, please refer to [Installation](#) and [running CHIPSEC](#)

### Python

Python downloads:

<https://www.python.org/downloads/>

# Installation

CHIPSEC supports Windows, Linux, DAL, and UEFI shell. Circumstances surrounding the target platform may change which of these environments is most appropriate.

## Linux Installation

### Tested on:

- [Fedora LXDE 64bit](#)
- [Ubuntu 64bit](#)
- [Debian 64bit and 32bit](#)
- [Linux UEFI Validation \(LUV\)](#)
- [ArchStrike Linux](#)
- [Kali Linux](#)

Run CHIPSEC on a desired Linux distribution or create a live Linux image on a USB flash drive and boot to it.

## Creating a Live Linux image

1. Download things you will need:
  - Desired Linux image (e.g. Fedora LXDE 64bit)
  - [Rufus](#)
2. Use Rufus to image a USB stick with the desired Linux image. Include as much persistent storage as possible.
3. Reboot to USB

## Installing Kali Linux

[Download](#) and [install](#) Kali Linux

## Prerequisites

Python 3.8 or higher (<https://www.python.org/downloads/>)

### Note

CHIPSEC has deprecated support for Python2 since June 2020

Install or update necessary dependencies before installing CHIPSEC:

## 4 - Installation

```
dnf install kernel kernel-devel-$(uname -r) python3 python3-devel gcc nasm redhat-rpm-config elfutils-libelf-devel git
```

or

```
apt-get install build-essential python3-dev python3 gcc linux-headers-$(uname -r) nasm
```

or

```
pacman -S python3 python3-setuptools nasm linux-headers
```

To install requirements:

```
pip install -r linux_requirements.txt
```

## Installing CHIPSEC

### Get latest CHIPSEC release from PyPI repository

```
pip install chipsec
```

#### Note

Version in PyPI is outdate please refrain from using until further notice

### Get CHIPSEC package from latest source code

Download zip from CHIPSEC repo

[Download CHIPSEC](#)

or

Clone CHIPSEC source

```
git clone https://github.com/chipsec/chipsec.git
```

## Building CHIPSEC

Build the Driver and Compression Tools

```
python setup.py build_ext -i
```

## Run CHIPSEC

Follow steps in section “Using as a Python package” of [Running CHIPSEC](#)

## DAL Windows Installation

### Prerequisites

Python 3.8 or higher (<https://www.python.org/downloads/>)

#### Note

CHIPSEC has deprecated support for Python2 since June 2020

pywin32: for Windows API support (<https://pypi.org/project/pywin32/#files>)

Intel System Studio: (<https://software.intel.com/en-us/system-studio>)

git: open source distributed version control system (<https://git-scm.com/>)

### Building

Clone CHIPSEC source

```
git clone https://github.com/chipsec/chipsec.git
```

## Windows Installation

CHIPSEC supports the following versions:

Windows 8, 8.1, 10, 11 - x86 and AMD64

Windows Server 2012, 2016, 2019, 2022, 2025 - x86 and AMD64

#### Note

CHIPSEC has removed support for the RWEverything (<https://rweverything.com/>) driver due to PCI configuration space access issues.

### Install CHIPSEC Dependencies

Python 3.8 or higher (<https://www.python.org/downloads/>)

#### Note

CHIPSEC has deprecated support for Python2 since June 2020

## 6 - DAL Windows Installation

To install requirements:

```
pip install -r windows_requirements.txt
```

which includes:

- [pywin32](#): for Windows API support (*pip install pywin32*)
- [setuptools](#) (*pip install setuptools*)
- [WConio2](#): Optional. For colored console output (*pip install Wconio2*)

To compile the driver:

[Visual Studio and WDK](#): for building the driver.

For best results use the latest available (**VS2022 + SDK/WDK 11** or **VS2019 + SDK/WDK 10 or 11**)

### Note

Make sure to install compatible VS/SDK/WDK versions and the spectre mitigation packages

To clone the repo:

[git](#): open source distributed version control system

## Building

Clone CHIPSEC source

```
git clone https://github.com/chipsec/chipsec.git
```

Build the Driver and Compression Tools

```
python setup.py build_ext -i
```

### Note

If build errors are with signing are encountered, try running as Administrator The .vcxproj file points to the latest SDK, if this is incompatible with the WDK, change the configuration to a compatible SDK within the project properties

## Turn off kernel driver signature checks

### Enable boot menu

In CMD shell:

```
bcdedit /set {bootmgr} displaybootmenu yes
```

### With Secure Boot enabled:

Method 1:

## 7 - DAL Windows Installation

- In CMD shell: `shutdown /r /t 0 /o` or Start button -> Power icon -> SHIFT key + Restart
- Navigate: Troubleshooting -> Advanced Settings -> Startup Settings -> Reboot
- After reset choose F7 or 7 “Disable driver signature checks”

Method 2:

- Disable Secure Boot in the BIOS setup screen then disable driver signature checks as with Secure Boot disabled

**With Secure Boot disabled:**

Method 1:

- **Boot in Test mode (allows self-signed certificates)**
  - Start CMD.EXE as Administrator `BcdEdit /set TESTSIGNING ON`
  - Reboot
  - **If this doesn't work, run these additional commands:**
    - `BcdEdit /set noIntegrityChecks ON`
    - `BcdEdit /set loadoptions DDISABLE_INTEGRITY_CHECKS`

Method 2:

- Press F8 when booting Windows and choose “No driver signatures enforcement” option to turn off driver signature checks

## Alternate Build Methods

### Build CHIPSEC kernel driver with Visual Studio

Method 1:

- Open the Visual Studio project file (`drivers/windows/chipsec_hlpr.vcxproj`) using Visual Studio
- Select Platform and configuration (X86 or x64, Release)
- Go to Build -> Build Solution

Method 2:

- Open a VS developer command prompt
- `> cd <CHIPSEC_ROOT_DIR>\drivers\windows`
- **Build driver using msbuild command:**

• `> msbuild /p:Platform=x64`  
or

• `> msbuild /p:Platform=x32`

If build process is completed without any errors, the driver binary will be moved into the chipsec helper directory:

`<CHIPSEC_ROOT_DIR>\chipsec\helper\windows\windows_amd64 (or i386)`

### Build the compression tools

## 8 - DAL Windows Installation

Method:

- Navigate to the chipsec\_toolscompression directory
- Run `python setup.py build`
- Copy the `EfiCompressor.cp<pyver>-win_<arch>.pyd` file from `build/lib.win-<arch>-<pyver>` to the root chipsec directory

### Alternate Method to load CHIPSEC service/driver

To create and start CHIPSEC service

```
sc create chipsec binpath="<PATH_TO_SYS>" type= kernel DisplayName="Chipsec driver" sc start chipsec
```

When finished running CHIPSEC stop/delete service:

```
sc stop chipsec sc delete chipsec
```


## Windows PCI Filter Driver

### Filter driver background

Since July 31, 2020 Microsoft has released Windows 2020-KB4568831 (OS Build 19041.423) Preview. Microsoft recommends to not access the PCI configuration space using the legacy API, as it might result in the Windows BSOD (Blue Screen of Death). The BSOD trigger condition is "Windows version >= (OS Build 19041.423) && Secure Devices (SDEV) ACPI table && VBS enabled". Therefore, CHIPSEC now includes a PCI filter driver which supplements the original CHIPSEC Windows Driver to access the PCI configuration space. A system requires the PCI Filter Driver if the conditions above are met.

Windows devices that receive the 2020-KB4568831 (OS Build 19041.423) Preview or later updates restrict how processes can access peripheral component interconnect (PCI) device configuration space if a Secure Devices (SDEV) ACPI table is present and Virtualization-based Security (VBS) is running. Processes that have to access PCI device configuration space must use officially supported mechanisms. The SDEV table defines secure hardware devices in ACPI. VBS is enabled on a system if security features that use virtualization are enabled. Some examples of these features are Hypervisor Code Integrity or Windows Defender Credential Guard. The new restrictions are designed to prevent malicious processes from modifying the configuration space of secure devices. Device drivers or other system processes must not try to manipulate the configuration space of any PCI devices, except by using the Microsoft-provided bus interfaces or IRP. If a process tries to access PCI configuration space in an unsupported manner (such as by parsing MCFG table and mapping configuration space to virtual memory), Windows denies access to the process and generates a Stop error. For more detail please refer below link: <https://learn.microsoft.com/en-us/troubleshoot/windows-client/performance/stop-error-lenovo-thinkpad-kb4568831-uefi>

### Filter Driver and Main Helper Driver Architecture

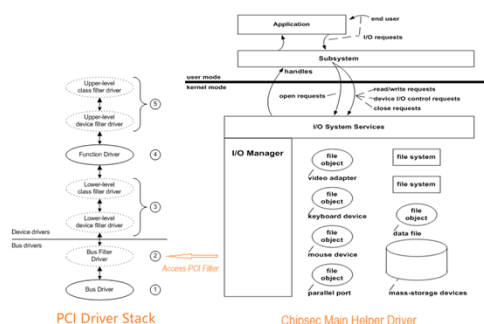





## CHIPSEC Main & Filter Driver Architecture

### Install PCI Filter Driver


#### 1. Locate the Filter Driver Files: chipsec/helper/windows/windows\_amd64/

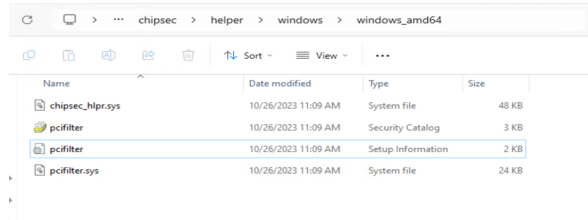


#### 2. Update The PCI Device Driver From Device Manager

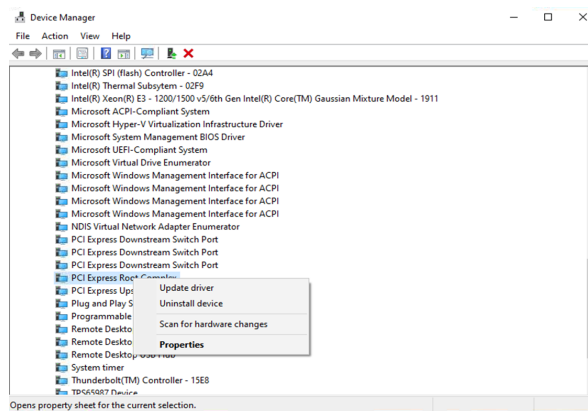

#### 3. Browse The PCI Filter Driver

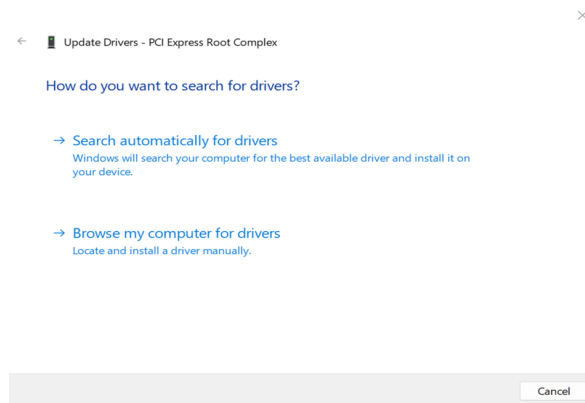

#### 4. Manually Select The PCI Bus Filter Driver



## 10 - DAL Windows Installation


### 5. Install The Filter Driver From Disk



### 6. Installing The Filter Driver



### 7. Finish The Filter Driver Installing

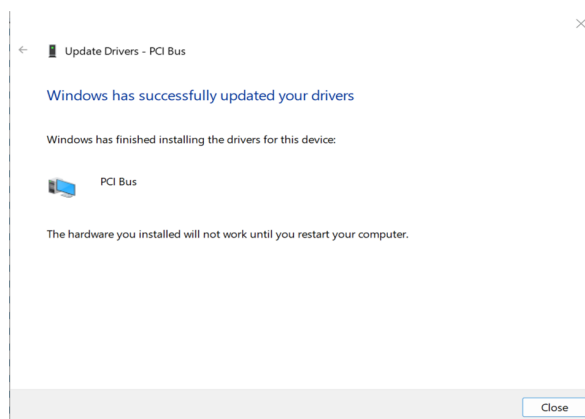


### 8. Restart Computer




### 9. Check The Installed Device Driver From Device Manager

## 11 - DAL Windows Installation

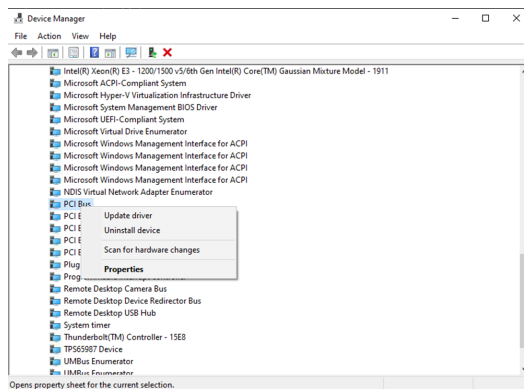

## 10. Check The Driver Device Info

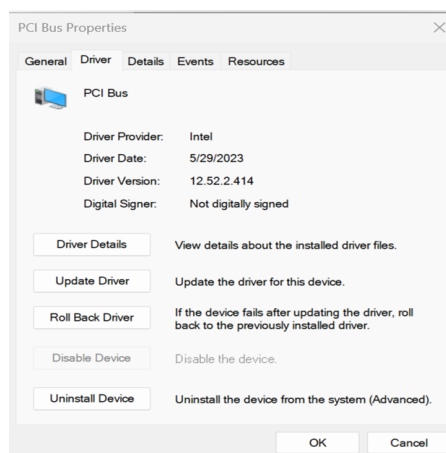

## Filter Driver Access PCI Config Space Test

### Dump PCI Config Test

```
C:\Users\Administrator\chipsec> py .\chipsec_util.py pci dump 0 0 0

#####
## CHIPSEC: Platform Hardware Security Assessment Framework ##
##
#####
[CHIPSEC] Version : 1.11.1
[CHIPSEC] Arguments: pci dump 0 0 0

WARNING: *****
WARNING: chipsec should only be used on test systems!
WARNING: It should not be installed/deployed on production end-user systems.
WARNING: See WARNING.txt
WARNING: *****

[CHIPSEC] OS : Windows 10 10.0.20348 AMD64
[CHIPSEC] Python : 3.11.2 (64-bit)
[CHIPSEC] helper : WindowsHelper (\\?\C:\Users\Administrator\Desktop\chipsec-1.11.1)
[CHIPSEC] platform: TDL UP3 4 Cores
[CHIPSEC] CPUID: 806C1
[CHIPSEC] VID: 8086
[CHIPSEC] DID: 8A14
[CHIPSEC] RID: 01
[CHIPSEC] PCH : Sxx PCH Premium UP3
[CHIPSEC] VID: 8086
[CHIPSEC] DID: A8B2
[CHIPSEC] RID: 20

[CHIPSEC] Executing command 'pci' with args ['dump', '0', '0', '0']

[CHIPSEC] PCI device 00:00:00 configuration:
00 01 02 03 04 05 06 07 08 09 0A 0B 0C 0D 0E 0F
10 00 00 14 00 00 00 20 01 00 00 00 00 00 00 00
18 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
20 00 00 00 00 00 00 00 00 00 00 00 00 00 01 30
30 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
40 01 10 DA FE 00 00 00 01 00 DC FE 00 00 00 00
50 C1 02 00 11 A0 00 00 C7 00 00 4F 01 00 4A
60 01 00 00 C0 00 00 00 01 00 DA FE 00 00 00 00
70 00 02 00 01 00 04 00 00 00 00 00 00 00 00 00
80 00 31 33 33 33 00 10 00 00 00 00 00 00 00 00
90 00 02 00 01 00 04 00 1A 02 00 01 00 04 00 00
A0 01 00 00 00 00 00 00 01 00 00 00 00 00 00 00
B0 01 00 00 01 00 00 00 00 01 00 00 00 00 00 00
C0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
D0 1A 02 00 01 00 04 00 00 00 00 00 00 00 00 00
E0 09 00 14 01 10 04 00 F2 08 00 24 10 0A 02 01 00
F0 00 00 15 00 10 0F 02 00 00 00 00 00 00 00 00
[CHIPSEC] (pci) time elapsed 0.000
C:\Users\Administrator\chipsec>
```

```
py chipsec_util.py pci dump 0 0 0
```

### PCI Enumeration Test

■

## 12 - Building a Bootable USB drive with UEFI Shell (x64)

```
py chipsec_util.py pci enumerate
```

### Building a Bootable USB drive with UEFI Shell (x64)

1. Format your media as FAT32
2. Create the following directory structure in the root of the new media
  - /efi/boot
3. Download the UEFI Shell (Shell.efi) from the following link
  - <https://github.com/tianocore/edk2/blob/UDK2018/ShellBinPkg/UefiShell/X64/Shell.efi>
4. Rename the UEFI shell file to Bootx64.efi
5. Copy the UEFI shell (now Bootx64.efi) to the /efi/boot directory

### Installing CHIPSEC

1. Extract the contents of `__install__/UEFI/chipsec_py368_uefi_x64.zip` to the USB drive, as appropriate.
  - This will create a /efi/Tools directory with Python.efi and /efi/StdLib with subdirectories for dependencies.
2. Copy the contents of CHIPSEC to the USB drive.

The contents of your drive should look like follows:

```
- fs0:
- efi
  - boot
    - bootx64.efi (optional)
  - StdLib
    - lib
      - python36.8
        - [lots of python files and directories]
  - Tools
    - Python.efi
- chipsec
  - chipsec
  - ...
  - chipsec_main.py
  - chipsec_util.py
  - ...
```

3. Reboot to the USB drive (this will boot to UEFI shell).
  - You may need to enable booting from USB in BIOS setup.
  - You will need to disable UEFI Secure Boot to boot to the UEFI Shell.

### Run CHIPSEC in UEFI Shell

```
fs0:
```

## 13 - Using CHIPSEC

```
cd chipsec
```

```
python.efi chipsec_main.py or python.efi chipsec_util.py
```

Next follow steps in section “Basic Usage” of [Running CHIPSEC](#)

### Building UEFI Python 3.6.8 (optional)

#### 1. Start with [Py368Readme.txt](#)

- Latest EDK2, visit [Tianocore EDK2 Github](#) (Make sure to update submodules)
- Latest EDK2-LIBC, visit [Tianocore EDK2-LIBC Github](#)
- Follow setup steps described in the `Py368Readme.txt`

#### 2. Make modifications as needed

- CPython / C file(s):
  - [edk2module.c](#)
- ASM file(s):
  - [cpu.nasm](#)
  - [cpu\\_ia32.nasm](#)
  - [cpu\\_gcc.s](#)
  - [cpu\\_ia32\\_gcc.s](#)
- INF file(s):
  - [Python368.inf](#)

#### 3. Build and directory creation steps are covered in the [Py368Readme.txt](#)

- MSVS build tools are highly recommended

## Using CHIPSEC

CHIPSEC should be launched as Administrator/root

CHIPSEC will automatically attempt to create and start its service, including load its kernel-mode driver. If CHIPSEC service is already running then it will attempt to connect to the existing service.

Use `--no-driver` command-line option to skip loading the kernel module. This option will only work for certain commands or modules.

## Interpreting results

## Note

DRAFT (work in progress)

In order to improve usability, we are reviewing and improving the messages and meaning of information returned by CHIPSEC.

## Results

### Generic results meanings

Result	Meaning
PASSED	A <b>mitigation</b> to a known vulnerability has been detected
FAILED	A known <b>vulnerability</b> has been detected
WARNING	We have detected something that could be a vulnerability but <b>manual analysis is required</b> to confirm (inconclusive)
NOT_APPLICABLE	The issue checked by this module is not applicable to this platform. This result can be ignored
INFORMATION	This module does not check for a vulnerability. It just prints information about the system
ERROR	Something went wrong in the execution of CHIPSEC

## Automated Tests

Each test module can log additional messaging in addition to the return value. In an effort to standardize and improve the clarity of this messaging, the mapping of result and messages is defined below:

### Modules results meanings

Test	PASSED message	FAILED message	WARNING message	Notes
memconfig	All memory map registers seem to be locked down	Not all memory map registers are locked down	N/A	

## 15 - Using CHIPSEC

Remap	Memory Remap is configured correctly and locked	Memory Remap is not properly configured/locked. Remapping attack may be possible.	N/A	
smm_dma	TSEG is properly configured. SMRAM is protected from DMA attacks.	TSEG is properly configured, but the configuration is not locked or TSEG is not properly configured. Portions of SMRAM may be vulnerable to DMA attacks	TSEG is properly configured but can't determine if it covers entire SMRAM	
common.bios_kbrd_buffer	"Keyboard buffer is filled with common fill pattern" or "Keyboard buffer looks empty. Pre-boot passwords don't seem to be exposed	FAILED	Keyboard buffer is not empty. The test cannot determine conclusively if it contains pre-boot passwords. The contents might have not been cleared by pre-boot firmware or overwritten with garbage. Visually inspect the contents of keyboard buffer for pre-boot passwords (BIOS, HDD, full-disk encryption).	Also printing a message if size of buffer is revealed. "Was your password %d characters long?"
common.bios_smi	All required SMI sources seem to be enabled and locked	Not all required SMI sources are enabled and locked	Not all required SMI sources are enabled and locked, but SPI flash writes are still restricted to SMM	
common.bios_ts	BIOS Interface is locked (including Top Swap Mode)	BIOS Interface is not locked (including Top Swap Mode)	N/A	

common.bios_wp	BIOS is write protected	BIOS should enable all available SMM based write protection mechanisms or configure SPI protected ranges to protect the entire BIOS region. BIOS is NOT protected completely	N/A	
common.ia32cfg	IA32_FEATURE_CONTROL MSR is locked on all logical CPUs	IA32_FEATURE_CONTROL MSR is not locked on all logical CPUs	N/A	
common.rtclock	Protected locations in RTC memory are locked	N/A	Protected locations in RTC memory are accessible (BIOS may not be using them)	
common.smm	Compatible SMRAM is locked down	Compatible SMRAM is not properly locked. Expected ( D_LCK = 1, D_OPEN = 0 )	N/A	Should return SKIPPED_NOT_APPLICABLE when compatible SMRAM is not enabled.
common.smrr	SMRR protection against cache attack is properly configured	SMRR protection against cache attack is not configured properly	N/A	
common.spi_access	SPI Flash Region Access Permissions in flash descriptor look ok	SPI Flash Region Access Permissions are not programmed securely in flash descriptor	Software has write access to GBe region in SPI flash" and "Certain SPI flash regions are writeable by software	we have observed production systems reacting badly when GBe was overwritten
common.spi_desc	SPI flash permissions prevent SW from writing to flash descriptor	SPI flash permissions allow SW to write flash descriptor	N/A	we can probably remove this now that we have spi_access
common.spi_fds	SPI Flash Descriptor Security Override is disabled	SPI Flash Descriptor Security Override is enabled	N/A	



## 17 - Running CHIPSEC

common.spi_lock	SPI Flash Controller configuration is locked	SPI Flash Controller configuration is not locked	N/A	
common.cpu.spectre_v2	CPU and OS support hardware mitigations (enhanced IBRS and STIBP)	CPU mitigation (IBRS) is missing	CPU supports mitigation (IBRS) but doesn't support enhanced IBRS" or "CPU supports mitigation (enhanced IBRS) but OS is not using it" or "CPU supports mitigation (enhanced IBRS) but STIBP is not supported/enabled	
common.secureboot.variables	All Secure Boot UEFI variables are protected	Not all Secure Boot UEFI variables are protected' (failure when secure boot is enabled)	Not all Secure Boot UEFI variables are protected' (warning when secure boot is disabled)	
common.uefi.access_uefispec	All checked EFI variables are protected according to spec	Some EFI variables were not protected according to spec	Extra/Missing attributes	
common.uefi.s3bootscript	N/A	S3 Boot-Script and Dispatch entry-points do not appear to be protected	S3 Boot-Script is not in SMRAM but Dispatch entry-points appear to be protected. Recommend further testing	unfortunately, if the boot script is well protected (in SMRAM) we cannot find it at all and end up returning warning

## Tools

CHIPSEC also contains tools such as fuzzers, which require a knowledgeable user to run. We can examine the usability of these tools as well.

## Running CHIPSEC

CHIPSEC should be launched as Administrator/root.

CHIPSEC will automatically attempt to create and start its service, including load its kernel-mode driver. If CHIPSEC service is already running then it will attempt to connect to the existing service.

## 18 - Running CHIPSEC

Use `--no-driver` command-line option to skip loading the kernel module. This option will only work for certain commands or modules.

Use `-m --module` to run a specific module (e.g. security check, a tool or a PoC..):

- `# python chipsec_main.py -m common.bios_wp`
- `# python chipsec_main.py -m common.spi_lock`
- `# python chipsec_main.py -m common.smrr`
- You can also use CHIPSEC to access various hardware resources:
  - `# python chipsec_util.py`

### Running in Shell

#### Basic usage

```
# python chipsec_main.py
# python chipsec_util.py
```

#### For help, run

```
# python chipsec_main.py --help
# python chipsec_util.py --help
```

### Using as a Python Package

Install CHIPSEC manually or from PyPI. You can then use CHIPSEC from your Python project or from the Python shell:

To install and run CHIPSEC as a package:

```
# python setup.py install
# sudo chipsec_main
```

From the Python shell:

```
>>> import chipsec_main
>>> chipsec_main.run()
>>> chipsec_main.run('-m common.bios_wp')
```

```
>>> import chipsec_util
>>> chipsec_util.run()
>>> chipsec_util.run('spi info')
```

To use CHIPSEC *in place* without installing it:

```
# python setup.py build_ext -i
# sudo python chipsec_main.py
```

## chipsec\_main options

```
usage: chipsec_main.py [options]

Options:
  -h, --help                Show this message and exit
  -m, --module _MODULE      Specify module to run (example: -m common.bios_wp)
  -mx, --module_exclude _MODULE1 ... Specify module(s) to NOT run (example: -mx common.bios_wp common.cpu.cpu_info)
  -a, --module_args _MODULE_ARGV Additional module arguments
  -v, --verbose              Verbose logging
  --hal                     HAL logging
  -d, --debug               Debug logging
  -l, --log LOG              Output to log file
  -vv, --vverbose           Very verbose logging (verbose + HAL + debug)

Advanced Options:
  -p, --platform _PLATFORM Explicitly specify platform code
  --pch _PCH                Explicitly specify PCH code
  -n, --no_driver           Chipsec won't need kernel mode functions so don't load chipsec driver
  -i, --ignore_platform     Run chipsec even if the platform is not recognized (Deprecated)
  -j, --json _JSON_OUT      Specify filename for JSON output
  -x, --xml _XML_OUT        Specify filename for xml output (JUnit style)
  -k, --markdown            Specify filename for markdown output
  -t, --moduletype USER_MODULE_TAGS Run tests of a specific type (tag)
  --list_tags               List all the available options for -t,--moduletype
  -I, --include IMPORT_PATHS Specify additional path to load modules from
  --failfast                Fail on any exception and exit (don't mask exceptions)
  --no_time                 Don't log timestamps
  --deltas _DELTAS_FILE     Specifies a JSON log file to compute result deltas from
  --helper _HELPER          Specify OS Helper
  -nb, --no_banner          Chipsec won't display banner information
  --skip_config             Skip configuration and driver loading
  -nl                       Chipsec won't save logs automatically
```

## chipsec\_util options

```
usage: chipsec_util.py [options] <command> [<args>]

Options:
  -h, --help                Show this message and exit
  -v, --verbose              Verbose logging
  --hal                     HAL logging
  -d, --debug               Debug logging
  -vv, --vverbose           Very verbose logging (verbose + HAL + debug)
  -l, --log LOG              Output to log file
  -p, --platform _PLATFORM Explicitly specify platform code
  --pch _PCH                Explicitly specify PCH code
  -n, --no_driver           Chipsec won't need kernel mode functions so don't load chipsec driver
  -i, --ignore_platform     Run chipsec even if the platform is not recognized (Deprecated)
  --helper _HELPER          Specify OS Helper
  -nb, --no_banner          Chipsec won't display banner information
  --skip_config             Skip configuration and driver loading
  -nl                       Chipsec won't save logs automatically
  command                   Util command to run
  args                      Additional arguments for specific command. All numeric values are in hex. <width> is in {1 - byte, 2 - word, 4 - dword}
```

## Windows Exception Errors

Windows exception errors have many different causes and at least as many possible solutions. The below 'fixes' may need to be used in combination to fix any of these issues.

### STATUS\_PRIVILEGED\_INSTRUCTION (0xC0000096)

This type of error often occurs on newer Windows OSes, often caused by the Windows *Device Guard* feature. THIS IS A KNOWN ISSUE WITH WINDOWS AND NOT A CHIPSEC BUG.

For CHIPSEC to work, the Windows *Device Guard* feature needs to be disabled.

### Example errors:

```
ERROR: HW Access Violation: DeviceIoControl returned STATUS_PRIVILEGED_INSTRUCTION (0xC0000096)
chipsec.helper.oshelper.HWAccessViolationError: HW Access Violation: DeviceIoControl returned STATUS_PRIVILEGED_INSTRUCTION (0xC0000096)
```

### Device Guard and Credential Guard hardware readiness tool

#### Device Guard and Credential Guard hardware readiness tool

#### Steps to disable Device Guard:

1. Download the Microsoft *Device Guard and Credential Guard hardware readiness tool*
2. Extract zip contents
3. Run this command (via PowerShell): `DG_Readiness.ps1 -Disable`
4. Reboot system and press **<F3>** when prompted (twice)
5. May take several reboots before finishing

### Note

Microsoft seems to no longer use “Device Guard”, instead now uses WDAC (Windows Defender Application Control).

### If the readiness tool doesn't work...

#### Workaround:

1. Launch *Local Group Policy Editor*
  - a. Run `-> gpedit.msc`
2. Change *Device Guard* setting to *Disabled*
  - a. Computer Configuration > Administrative Templates > System > Device Guard
  - b. Switch *Device Guard* from “Not Configured” to “Disabled”
3. Save changes and exit *Group Policy Editor*
4. Reboot

### Note

Windows Home version may NOT have *Group Policy Editor* loaded by default.

### Windows Home workaround:

There is no guarantee that these steps will work. If they don't, it is recommended to use *Windows Pro* or *Windows Enterprise* versions that include the *Group Policy Editor*.

1. From a Windows PowerShell *Run as Administrator*, run these commands sequentially:

```
FOR %F IN ("%SystemRoot%\servicing\Packages\Microsoft-Windows-GroupPolicy-ClientTools-Package~*.mum") DO (
DISM /Online /NoRestart /Add-Package:"%F"
)

FOR %F IN ("%SystemRoot%\servicing\Packages\Microsoft-Windows-GroupPolicy-ClientExtensions-Package~*.mum") DO (
DISM /Online /NoRestart /Add-Package:"%F"
)
```

2. After these commands complete, reboot the system. The *Group Policy Editor* should now be installed and ready to run the above steps to disable *Device Guard*.

### Note

Occasionally Windows does not include the needed *Administrative template* for *Device Guard* to be visible and the template will have to be updated. In this case, download the below update and run it on the system. Reboot the system and verify that *Device Guard* is now visible.

Updated Windows 10 Administrative Template: <https://www.microsoft.com/en-us/download/100591>

It is possible that the template update does NOT have the needed permissions to properly update the template. A manual update may be needed. Don't forget to reboot after.

3. Manually copy the **.admx** and **.adml** files from the update folder **C:\Program Files (x86)\Microsoft Group Policy\Windows 10 November 2019 Update (1909)\PolicyDefinitions\** to **C:\Windows\PolicyDefinitions**

If this last step does not work, you will have to use a different OS.

### ERROR: Exception occurred during ...

This error, like the previous issue, appears to be related to a Windows Server OS and its security protections. Often happening when trying to read an MSR, MMIO, or device. Windows Server OS appears to be blocking read access to them. MSR and MMIO reads will simply fail with this error message. Device (PCI) reads appear to mask the device and return all 0xF's, causing an error parsing them.

One or more of the above mentioned solutions *may* fix this.

Example MSR/MMIO error:

```
ERROR: Exception occurred during chipsec.modules.common.smm_dma.run(): 'TSEGBM'
```

Example PCI error:

```
ERROR: Exception occurred during chipsec.modules.common.bios_smi.run(): 'integer out of range for 'H' format code'
```

## Windows driver: StartService error

A Windows security feature called HVCI can cause issues running CHIPSEC. HVCI should be disabled. Follow the steps described above to disable HVCI.

Follow these steps to disable HVCI:

[How to disable HVCI](#)

[Full details on HVCI](#)

Example error messages:

```
ERROR: service 'chipsec' didn't start: The parameter is incorrect. (87)
[-] Traceback (most recent call last):
  File "\chipsec\helper\win\win32helper.py", line 434, in start
    win32serviceutil.StartService( SERVICE_NAME )
  File "\lib\site-packages\win32\lib\win32serviceutil.py", line 417, in StartService
    win32service.StartService(hs, args)
pywintypes.error: (87, 'StartService', 'The parameter is incorrect.')
```

And...

```
chipsec.helper.oshelper.OsHelperError: service 'chipsec' didn't start: The parameter is incorrect. (87)
```

## Additional details

Windows Device Guard


Windows Credential Guard

WDAC – Windows Defender Application Control

Hypervisor-Protected Code Integrity (HVCI)

## Module & Command Development

### Architecture Overview

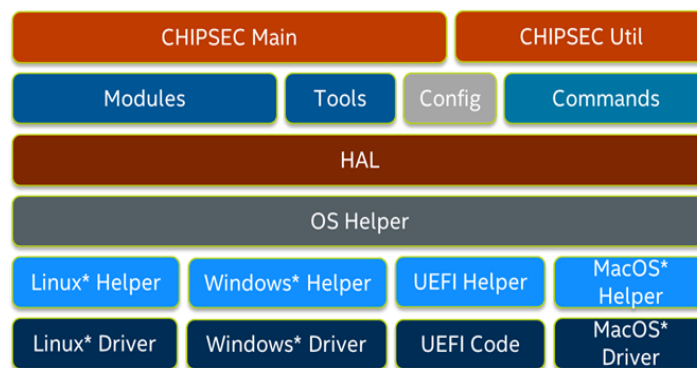

*CHIPSEC Architecture*

### Core components

<code>chipsec_main.py</code>	main application logic and automation functions
<code>chipsec_util.py</code>	utility functions (access to various hardware resources)
<code>chipsec/chipset.py</code>	chipset detection
<code>chipsec/command.py</code>	base class for util commands
<code>chipsec/defines.py</code>	common defines
<code>chipsec/file.py</code>	reading from/writing to files
<code>chipsec/logger.py</code>	logging functions
<code>chipsec/module.py</code>	generic functions to import and load modules
<code>chipsec/module_common.py</code>	base class for modules
<code>chipsec/result_deltas.py</code>	supports checking result deltas between test runs

chipsec/testcase.py	support for XML and JSON log file output
chipsec/helper/helpers.py	registry of supported OS helpers
chipsec/helper/oshelper.py	OS helper: wrapper around platform specific code that invokes kernel driver

## Commands

Implement functionality of chipsec\_util.

CHIPSEC utilities provide the capability for manual testing and direct hardware access.

### Warning

DIRECT HARDWARE ACCESS PROVIDED BY THESE UTILITIES COULD MAKE YOUR SYSTEM UNBOOTABLE. MAKE SURE YOU KNOW WHAT YOU ARE DOING!

### Note

All numeric values in the instructions are in hex.

## chipsec.utilcmd package

### chipsec.utilcmd.acpi\_cmd module

Command-line utility providing access to ACPI tables

```
>>> chipsec_util acpi list
>>> chipsec_util acpi table <name>|<file_path>
>>> chipsec_util acpi mmio-regions
```

Examples:

```
>>> chipsec_util acpi list
>>> chipsec_util acpi table XSDT
>>> chipsec_util acpi table acpi_table.bin
>>> chipsec_util acpi mmio-regions
>>> chipsec_util acpi mmio-regions --space systemmemory
```

### chipsec.utilcmd.chipset\_cmd module

usage as a standalone utility:

```
>>> chipsec_util platform
```

### chipsec.utilcmd.cmos\_cmd module

```
>>> chipsec_util cmos dump
>>> chipsec_util cmos readl|writel|readh|writeh <byte_offset> [byte_val]
```

#### Examples:

```
>>> chipsec_util cmos dump
>>> chipsec_util cmos readl 0x0
>>> chipsec_util cmos writeh 0x0 0xCC
```

### chipsec.utilcmd.config\_cmd module

```
>>> chipsec_util config show [config] <name>
```

#### Examples:

```
>>> chipsec_util config show ALL
>>> chipsec_util config show [CONFIG_PCI|MEMORY_RANGES|MM_MSGBUS|MSGBUS|IO|MSR]
>>> chipsec_util config show SCOPE
```

### chipsec.utilcmd.cpu\_cmd module

```
>>> chipsec_util cpu info
>>> chipsec_util cpu cr <thread> <cr_number> [value]
>>> chipsec_util cpu cpuid <eax> [ecx]
>>> chipsec_util cpu pt [paging_base_cr3]
>>> chipsec_util cpu topology
```

#### Examples:

```
>>> chipsec_util cpu info
>>> chipsec_util cpu cr 0 0
>>> chipsec_util cpu cr 0 4 0x0
>>> chipsec_util cpu cpuid 0x40000000
>>> chipsec_util cpu pt
>>> chipsec_util cpu topology
```

### chipsec.utilcmd.decode\_cmd module

### chipsec.utilcmd.deltas\_cmd module

```
>>> chipsec_util deltas <previous> <current> [out-format] [out-name]
```

out-format - JSON | XML out-name - Output file name

Example: >>> chipsec\_util deltas run1.json run2.json

### chipsec.utilcmd.desc\_cmd module

The idt, gdt and ldt commands print the IDT, GDT and LDT, respectively.



## 25 - Module & Command Development

### IDT command:

```
>>> chipsec_util idt [cpu_id]
```

### Examples:

```
>>> chipsec_util idt 0
>>> chipsec_util idt
```

### GDT command:

```
>>> chipsec_util gdt [cpu_id]
```

### Examples:

```
>>> chipsec_util gdt 0
>>> chipsec_util gdt
```

### LDT command:

```
>>> chipsec_util ldt [cpu_id]
```

### Examples:

```
>>> chipsec_util ldt 0
>>> chipsec_util ldt
```

## chipsec.utilcmd.ec\_cmd module

```
>>> chipsec_util ec dump      [<size>]
>>> chipsec_util ec command <command>
>>> chipsec_util ec read      <offset> [<size>]
>>> chipsec_util ec write     <offset> <byte_val>
>>> chipsec_util ec index     [<offset>]
```

### Examples:

```
>>> chipsec_util ec dump
>>> chipsec_util ec command 0x001
>>> chipsec_util ec read     0x2F
>>> chipsec_util ec write    0x2F 0x00
>>> chipsec_util ec index
```

## chipsec.utilcmd.hals\_cmd module

Requires the Driver. Lists all available HALs (Hardware Abstraction Layers). >>> chipsec\_util hals list >>> chipsec\_util hals listloadable >>> chipsec\_util hals funcs <hal\_name>

### Examples:

```
>>> chipsec_util hals list
>>> chipsec_util hals listloadable
>>> chipsec_util hals funcs Pci
```

## chipsec.utilcmd.igd\_cmd module

The igd command allows memory read/write operations using igd dma.

```
>>> chipsec_util igd
>>> chipsec_util igd dmaread <address> [width] [file_name]
>>> chipsec_util igd dmawrite <address> <width> <value|file_name>
```

## 26 - Module & Command Development

### Examples:

```
>>> chipsec_util igd dmaread 0x20000000 4
>>> chipsec_util igd dmawrite 0x2217F1000 0x4 deadbeef
```

### chipsec.utilcmd.interrupts\_cmd module

#### SMI command:

```
>>> chipsec_util smi count
>>> chipsec_util smi send <thread_id> <SMI_code> <SMI_data> [RAX] [RBX] [RCX] [RDX] [RSI] [RDI]
>>> chipsec_util smi smmc <RT_code_start> <RT_code_end> <GUID> <payload_loc> <payload_file|payload_string> [port]
```

#### Examples:

```
>>> chipsec_util smi count
>>> chipsec_util smi send 0x0 0xDE 0x0
>>> chipsec_util smi send 0x0 0xDE 0x0 0xAAAAAAAAAAAAAAAA ..
>>> chipsec_util smi smmc 0x79dfe000 0x79efdfff ed32d533-99e6-4209-9cc02d72cdd998a7 0x79dfaaaa payload.bin
```

#### NMI command:

```
>>> chipsec_util nmi
```

#### Examples:

```
>>> chipsec_util nmi
```

### chipsec.utilcmd.io\_cmd module

The io command allows direct access to read and write I/O port space.

```
>>> chipsec_util io list
>>> chipsec_util io read <io_port> <width>
>>> chipsec_util io write <io_port> <width> <value>
```

#### Examples:

```
>>> chipsec_util io list
>>> chipsec_util io read 0x61 1
>>> chipsec_util io write 0x430 1 0x0
```

### chipsec.utilcmd.iommu\_cmd module

Command-line utility providing access to IOMMU engines

```
>>> chipsec_util iommu list
>>> chipsec_util iommu config [iommu_engine]
>>> chipsec_util iommu status [iommu_engine]
>>> chipsec_util iommu enable|disable <iommu_engine>
>>> chipsec_util iommu pt
```

#### Examples:

```
>>> chipsec_util iommu list
>>> chipsec_util iommu config VTD
>>> chipsec_util iommu status GFXVTD
>>> chipsec_util iommu enable VTD
>>> chipsec_util iommu pt
```

## chipsec.utilcmd.lock\_check\_cmd module

```
>>> chipsec_util check list
>>> chipsec_util check lock <lockname>
>>> chipsec_util check lock <lockname1, lockname2, ...>
>>> chipsec_util check all
```

## Examples:

```
>>> chipsec_util check list
>>> chipsec_util check lock DebugLock
>>> chipsec_util check all
```

## KEY:

Lock Name - Name of Lock within configuration file State - Lock Configuration

Undefined - Lock is not defined within configuration Undoc - Lock is missing configuration information Hidden - Lock is in a disabled or hidden state (unable to read the lock) Unlocked - Lock does not match value within configuration Locked - Lock matches value within configuration RW/O - Lock is identified as register is RW/O

## chipsec.utilcmd.mem\_cmd module

The mem command provides direct access to read and write physical memory.

```
>>> chipsec_util mem <op> <physical_address> <length> [value|buffer_file]
>>> <physical_address> : 64-bit physical address
>>> <op>                : read|readval|write|writeval|allocate|pagedump|search
>>> <length>            : byte|word|dword or length of the buffer from <buffer_file>
>>> <value>             : byte, word or dword value to be written to memory at <physical_address>
>>> <buffer_file>       : file with the contents to be written to memory at <physical_address>
```

## Examples:

```
>>> chipsec_util mem <op>      <physical_address> <length> [value|file]
>>> chipsec_util mem readval   0xFED40000          dword
>>> chipsec_util mem read      0x41E                0x20    buffer.bin
>>> chipsec_util mem writeval   0xA0000             dword    0x9090CCCC
>>> chipsec_util mem write      0x100000000          0x1000   buffer.bin
>>> chipsec_util mem write      0x100000000          0x10     000102030405060708090A0B0C0D0E0F
>>> chipsec_util mem allocate   0x1000
>>> chipsec_util mem pagedump   0xFED00000          0x100000
>>> chipsec_util mem search     0xF0000             0x10000   _SM_
```

## chipsec.utilcmd.mm\_msgbus\_cmd module

```
>>> chipsec_util mm_msgbus read    <port> <register>
>>> chipsec_util mm_msgbus write    <port> <register> <value>
>>>
>>> <port>      : message bus port of the target unit
>>> <register> : message bus register/offset in the target unit port
>>> <value>     : value to be written to the message bus register/offset
```

## Examples:

```
>>> chipsec_util mm_msgbus read  0x3 0x2E
>>> chipsec_util msgbus mm_write 0x3 0x27 0xE0000001
```

**chipsec.utilcmd.mmcfg\_base\_cmd module**

The mmcfg\_base command displays PCIe MMCFG Base/Size.

Usage:

```
>>> chipsec_util mmcfg_base
```

Examples:

```
>>> chipsec_util mmcfg_base
```

**chipsec.utilcmd.mmcfg\_cmd module**

The mmcfg command allows direct access to memory mapped config space.

```
>>> chipsec_util mmcfg base
>>> chipsec_util mmcfg read <bus> <device> <function> <offset> <width>
>>> chipsec_util mmcfg write <bus> <device> <function> <offset> <width> <value>
>>> chipsec_util mmcfg ec
```

Examples:

```
>>> chipsec_util mmcfg base
>>> chipsec_util mmcfg read 0 0 0 0x200 4
>>> chipsec_util mmcfg write 0 0 0 0x200 1 0x1A
>>> chipsec_util mmcfg ec
```

**chipsec.utilcmd.mmio\_cmd module**

```
>>> chipsec_util mmio list
>>> chipsec_util mmio dump <MMIO_BAR_name> [offset] [length]
>>> chipsec_util mmio dump-abs <MMIO_base_address> [offset] [length]
>>> chipsec_util mmio read <MMIO_BAR_name> <offset> <width>
>>> chipsec_util mmio read-abs <MMIO_base_address> <offset> <width>
>>> chipsec_util mmio write <MMIO_BAR_name> <offset> <width> <value>
>>> chipsec_util mmio write-abs <MMIO_base_address> <offset> <width> <value>
```

Examples:

```
>>> chipsec_util mmio list
>>> chipsec_util mmio dump MCHBAR
>>> chipsec_util mmio dump-abs 0xFE010000 0x70 0x10
>>> chipsec_util mmio read SPIBAR 0x74 0x4
>>> chipsec_util mmio read-abs 0xFE010000 0x74 0x04
>>> chipsec_util mmio write SPIBAR 0x74 0x4 0xFFFF0000
>>> chipsec_util mmio write-abs 0xFE010000 0x74 0x04 0xFFFF0000
```

**chipsec.utilcmd.module\_id\_cmd module**

Generate a module ID using hashlib from the module's file name (no file extension). Hash is truncated to 28 bits. For module names use full path as seen in example below.

Usage:

```
chipsec_util id name <module name> chipsec_util id hash <module hash>
```

Examples:

```
>>> chipsec_util.py id name chipsec.modules.common.remap
>>> chipsec_util.py id hash 0x67eb58d
```

## chipsec.utilcmd.msgbus\_cmd module

```
>>> chipsec_util msgbus read      <port> <register>
>>> chipsec_util msgbus write     <port> <register> <value>
>>> chipsec_util msgbus message   <port> <register> <opcode> [value]
>>>
>>> <port>      : message bus port of the target unit
>>> <register>: message bus register/offset in the target unit port
>>> <value>     : value to be written to the message bus register/offset
>>> <opcode>    : opcode of the message on the message bus
```

## Examples:

```
>>> chipsec_util msgbus read      0x3 0x2E
>>> chipsec_util msgbus message   0x3 0x2E 0x10
>>> chipsec_util msgbus message   0x3 0x2E 0x11 0x0
```

## chipsec.utilcmd.msr\_cmd module

The msr command allows direct access to read and write MSRs.

```
>>> chipsec_util msr <msr> [eax] [edx] [thread_id]
```

## Examples:

```
>>> chipsec_util msr 0x3A
>>> chipsec_util msr 0x3A 0x0
>>> chipsec_util msr 0x8B 0x0 0x0 0x0
```

## chipsec.utilcmd.pci\_cmd module

The pci command can enumerate PCI/PCIe devices, enumerate expansion ROMs and allow direct access to PCI configuration registers via bus/device/function.

```
>>> chipsec_util pci enumerate
>>> chipsec_util pci read <bus> <device> <function> <offset> [width]
>>> chipsec_util pci write <bus> <device> <function> <offset> <width> <value>
>>> chipsec_util pci dump [<bus>] [<device>] [<function>]
>>> chipsec_util pci xrom [<bus>] [<device>] [<function>] [xrom_address]
>>> chipsec_util pci cmd [mask] [class] [subclass]
```

## Examples:

```
>>> chipsec_util pci enumerate
>>> chipsec_util pci read 0 0 0 0x00
>>> chipsec_util pci read 0 0 0 0x88 byte
>>> chipsec_util pci write 0 0x1F 0 0xDC 1 0x1
>>> chipsec_util pci write 0 0 0 0x98 dword 0x004E0040
>>> chipsec_util pci dump
>>> chipsec_util pci dump 0 0 0
>>> chipsec_util pci xrom
>>> chipsec_util pci xrom 3 0 0 0xFEDF0000
>>> chipsec_util pci cmd
>>> chipsec_util pci cmd 1
```

## chipsec.utilcmd.reg\_cmd module

```
>>> chipsec_util reg read <reg_name> [<field_name>]
>>> chipsec_util reg read_field <reg_name> <field_name>
>>> chipsec_util reg write <reg_name> <value>
>>> chipsec_util reg write_field <reg_name> <field_name> <value>
>>> chipsec_util reg get_control <control_name>
>>> chipsec_util reg set_control <control_name> <value>
```

## Examples:

```
>>> chipsec_util reg read SMBUS_VID
>>> chipsec_util reg read HSFC_FGO
>>> chipsec_util reg read_field HSFC_FGO
>>> chipsec_util reg write SMBUS_VID 0x8088
>>> chipsec_util reg write_field BC_BLE 0x1
>>> chipsec_util reg get_control BiosWriteEnable
>>> chipsec_util reg set_control BiosLockEnable 0x1
```

## chipsec.utilcmd.smbios\_cmd module

```
>>> chipsec_util smbios entrypoint
>>> chipsec_util smbios get [raw|decoded] [type]
```

## Examples:

```
>>> chipsec_util smbios entrypoint
>>> chipsec_util smbios get raw
```

## chipsec.utilcmd.smbus\_cmd module

## SMBus chipsec utility

## Usage:

```
>>> chipsec_util smbus read <device_addr> <offset> [size] [--OnSemi] [flags]
>>> chipsec_util smbus read_block <device_addr> <offset> [flags]
>>> chipsec_util smbus write <device_addr> <offset> <byte_val> [size] [--OnSemi] [flags]
>>> chipsec_util smbus process_call <device_addr> <offset> <byte_val> [flags]
>>> chipsec_util smbus scan [<start> [<stop>]] [flags]
>>> chipsec_util smbus dump <device_addr> [<start> [<stop>]] [flags]
```

flags = -addr8b, -mmio, -i2c

## Examples:

```
>>> chipsec_util smbus read 0xA0 0x0 0x100
```

## chipsec.utilcmd.spd\_cmd module

```
>>> chipsec_util spd detect
>>> chipsec_util spd dump [device_addr]
>>> chipsec_util spd read <device_addr> <offset>
>>> chipsec_util spd write <device_addr> <offset> <byte_val>
```

## Examples:

```
>>> chipsec_util spd detect
>>> chipsec_util spd dump DIMM0
>>> chipsec_util spd dump 0xA0
```

## 31 - Module & Command Development

```
>>> chipsec_util spd read DIMM2 0x0
>>> chipsec_util spd read 0xA0 0x0
>>> chipsec_util spd write 0xA0 0x0 0xAA
```

### chipsec.utilcmd.spi\_cmd module

CHIPSEC includes functionality for reading and writing the SPI flash. When an image file is created from reading the SPI flash, this image can be parsed to reveal sections, files, variables, etc.

#### Warning

Particular care must be taken when using the SPI write and SPI erase functions. These could make your system unbootable.

A basic forensic operation might be to dump the entire SPI flash to a file. This is accomplished as follows:

```
# python chipsec_util.py spi dump rom.bin
```

The file rom.bin will contain the full binary of the SPI flash. It can then be parsed using the decode util command.

```
>>> chipsec_util spi info|dump|read|write|erase|disable-wp [flash_address] [length] [file]
```

Examples:

```
>>> chipsec_util spi info
>>> chipsec_util spi dump rom.bin
>>> chipsec_util spi read 0x700000 0x100000 bios.bin
>>> chipsec_util spi write 0x0 flash_descriptor.bin
>>> chipsec_util spi disable-wp
>>> chipsec_util spi sfdp
>>> chipsec_util spi jedec
>>> chipsec_util spi jedec decode
```

### chipsec.utilcmd.spidesc\_cmd module

```
>>> chipsec_util spidesc <rom>
```

Examples:

```
>>> chipsec_util spidesc spi.bin
```

### chipsec.utilcmd.tpm\_cmd module

```
>>> chipsec_util tpm parse_log <file>
>>> chipsec_util tpm state <locality>
>>> chipsec_util tpm command <commandName> <locality> <command_parameters>
```

locality: 0 | 1 | 2 | 3 | 4 commands - parameters: pccrread - pcr number ( 0 - 23 ) nvread - Index, Offset, Size  
startup - startup type ( 1 - 3 ) continueselftest getcap - Capabilities Area, Size of Sub-capabilities,  
Sub-capabilities forceclear

Examples:

## 32 - Module & Command Development

```
>>> chipsec_util tpm parse_log binary_bios_measurements
>>> chipsec_util tpm state 0
>>> chipsec_util tpm command pcrread 0 17
>>> chipsec_util tpm command continueselftest 0
```

### chipsec.utilcmd.txt\_cmd module

Command-line utility providing access to Intel TXT (Trusted Execution Technology) registers

#### Usage:

```
>>> chipsec_util txt dump
>>> chipsec_util txt state
```

### chipsec.utilcmd.unicode\_cmd module

```
>>> chipsec_util unicode id|load|decode [unicode_update_file (in .PDB or .BIN format)] [cpu_id]
```

#### Examples:

```
>>> chipsec_util unicode id
>>> chipsec_util unicode load unicode.bin 0
>>> chipsec_util unicode decode unicode.pdb
```

### chipsec.utilcmd.uefi\_cmd module

### chipsec.utilcmd.vmem\_cmd module

The vmem command provides direct access to read and write virtual memory.

```
>>> chipsec_util vmem <op> <virtual_address> <length> [value|buffer_file]
>>>
>>> <virtual_address> : 64-bit virtual address
>>> <op>               : read|readval|write|writeval|allocate|pagedump|search|getphys
>>> <length>           : byte|word|dword or length of the buffer from <buffer_file>
>>> <value>            : byte, word or dword value to be written to memory at <virtual_address>
>>> <buffer_file>      : file with the contents to be written to memory at <virtual_address>
```

#### Examples:

```
>>> chipsec_util vmem <op>      <virtual_address> <length> [value|file]
>>> chipsec_util vmem readval   0xFED40000      dword
>>> chipsec_util vmem read      0x41E           0x20    buffer.bin
>>> chipsec_util vmem writeval  0xA0000          dword   0x9090CCCC
>>> chipsec_util vmem write     0x100000000       0x1000  buffer.bin
>>> chipsec_util vmem write     0x100000000       0x10    000102030405060708090A0B0C0D0E0F
>>> chipsec_util vmem allocate                    0x1000
>>> chipsec_util vmem search    0xF0000          0x10000  _SM_
>>> chipsec_util vmem getphys   0xFED00000
```



### chipsec.utilcmd.vmm\_cmd module

```
>>> chipsec_util vmm hypercall <rax> <rbx> <rcx> <rdx> <rdi> <rsi> [r8] [r9] [r10] [r11]
>>> chipsec_util vmm hypercall <eax> <ebx> <ecx> <edx> <edi> <esi>
>>> chipsec_util vmm pt|ept <ept_pointer>
>>> chipsec_util vmm is_virtio [<bus> <device> <function>]
>>> chipsec_util vmm virtio
```

#### Examples:

```
>>> chipsec_util vmm hypercall 32 0 0 0 0 0
>>> chipsec_util vmm pt 0x524B01E
>>> chipsec_util vmm virtio
>>> chipsec_util vmm is_virtio 0 6 0
```

## HAL (Hardware Abstraction Layer)

Useful abstractions for common tasks such as accessing the SPI.

### chipsec.hal package

#### chipsec.hal.hal\_base module

Base for HAL Components

#### chipsec.hal.hals module

## Fuzzing

### chipsec.fuzzing package

#### chipsec.fuzzing.primitives module

## CHIPSEC\_MAIN Program Flow

1. Select OS Helpers and Drivers
  - Load Driver (optional)
2. Detect Platform

## 34 - Configuration Files

3. Load [Configuration Files](#)
4. Load Modules
5. Run Loaded Modules
6. Report Results
7. Cleanup

### CHIPSEC\_UTIL Program Flow

1. Select [OS Helpers and Drivers](#)
  - Load Driver (optional)
2. [Detect Platform](#)
3. Load [Configuration Files](#)
4. Load Utility Commands
5. Run Selected Command
6. Cleanup

### Auxiliary components

- `setup.py` setup script to install CHIPSEC as a package

### Executable build scripts

- `<CHIPSEC_ROOT>/scripts/build_exe_*.py` make files to build Windows executables

## Configuration Files

Provide a human readable abstraction for registers in the system

<code>chipsec/cfg/8086</code>	platform specific configuration xml files
<code>chipsec/cfg/8086/common.xml</code>	common configuration
<code>chipsec/cfg/8086/&lt;platform&gt;.xml</code>	configuration for a specific <platform>

Broken into common and platform specific configuration files.

Used to define controls, registers and bit fields.

Common files always loaded first so the platform files can override values.

Correct platform configuration files loaded based off of platform detection.

## Configuration File Example

```
<mmio>
<bar name="SPIBAR" bus="0" dev="0x1F" fun="5" reg="0x10" width="4" mask="0xFFFFF000" size="0x1000" desc="SPI Controller Register Range" offset="0x0"/>
</mmio>
<registers>
<register name="BC" type="pcicfg" bus="0" dev="0x1F" fun="5" offset="0xDC" size="4" desc="BIOS Control">
<field name="BIOSWE" bit="0" size="1" desc="BIOS Write Enable" />
...
<field name="BILD" bit="7" size="1" desc="BIOS Interface Lock Down"/>
</register>
</registers>
<controls>
<control name="BiosInterfaceLockDown" register="BC" field="BILD" desc="BIOS Interface Lock-Down"/>
</controls>
```

## List of Cfg components

### arl

Path: chipsec\cfg\8086\arl.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2026, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

### pch\_3xxlp\_orig.

Path: chipsec\cfg\8086\pch\_3xxlp\_orig.xmls

XML configuration file for the 300 series LP (U/Y) PCH <https://www.intel.com/content/www/us/en/products/docs/processors/core/7th-and-8th-gen-core-family-mobile-u-y-processor-lines-i-o-datasheet-vol-2.html> 334659-005

### kbl\_orig.

Path: chipsec\cfg\8086\kbl\_orig.xmls

XML configuration file for Kaby Lake based platforms

<http://www.intel.com/content/www/us/en/processors/core/core-technical-resources.html>

- 7th Generation Intel(R) Processor Families for U/Y-Platforms
- 7th Generation Intel(R) Processor Families I/O for U/Y-Platforms

## tglu

Path: chipsec\cfg\8086\tglu.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2021, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

## kbl

Path: chipsec\cfg\8086\kbl.xml

XML configuration file for Ice Lake

## pch\_7xxOP

Path: chipsec\cfg\8086\pch\_7xxOP.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2026, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

## pch\_6xxp

Path: chipsec\cfg\8086\pch\_6xxp.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2021, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

### pch\_7xx

Path: chipsec\cfg\8086\pch\_7xx.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2026, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

### adl

Path: chipsec\cfg\8086\adl.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2023, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

### pch\_8xx

Path: chipsec\cfg\8086\pch\_8xx.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2026, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

**mtl**

Path: chipsec\cfg\8086\mtl.xml

XML configuration file for Ice Lake

**rpl**

Path: chipsec\cfg\8086\rpl.xml

CHIPSEC: Platform Security Assessment Framework Copyright (c) 2026, Intel Corporation

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; Version 2.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Contact information: [chipsec@intel.com](mailto:chipsec@intel.com)

**pch\_5xxlp**

Path: chipsec\cfg\8086\pch\_5xxlp.xml

XML configuration file for 5XX series pch

## Writing Your Own Modules

Your module class should subclass `BaseModule` and implement at least the methods named `is_supported` and `run`. When `chipsec_main` runs, it will first run `is_supported` and if that returns true, then it will call `run`.

As of CHIPSEC version 1.2.0, CHIPSEC implements an abstract name for platform *controls*. Module authors are encouraged to create controls in the XML configuration files for important platform configuration information and then use `get_control` and `set_control` within modules. This abstraction allows modules to test for the abstract control without knowing which register provides it. (This is especially important for test reuse across platform generations.)

Most modules read some platform configuration and then pass or fail based on the result. For example:

1. Define the control in the platform XML file (in `chipsec/cfg`):

```
<control name="BiosLockEnable" register="BC" field="BLE" desc="BIOS Lock Enable"/>
```

2. Get the current status of the control:

```
ble = self.cs.control.get_list_by_name('BiosLockEnable').is_all_value(1)
```

3. React based on the status of the control:

```
if ble:
    self.logger.log_passed("BIOS Lock is set.")
else:
    self.logger.log_failed("BIOS Lock is not set.")
```

4. Set and Return `self.res`:

```

if ble:
    self.res = ModuleResult.PASSED
else:
    self.res = ModuleResult.FAILED
return self.res

```

The CHIPSEC HAL and other APIs are also available within these modules. See the next sections for details about the available functionality.

Copy your module into the `chipsec/modules/` directory structure.

- Modules specific to a certain platform should implement `is_supported` function which returns `True` for the platforms the module is applicable to.
- Modules specific to a certain platform can also be located in `chipsec/modules/<platform_code>` directory, for example `chipsec/modules/hsw`. Supported platforms and their code can be found by running `chipsec_main.py --help`.
- Modules common to all platform which CHIPSEC supports can be located in `chipsec/modules/common` directory.

If a new platform needs to be added:

- Review the platform datasheet and include appropriate information in an XML configuration file for the platform. Place this file in `chipsec/cfg/8086`. Registers that are correctly defined in `common.xml` will be inherited and do not need to be added. Use `common.xml` as an example. It is based on the 4th Generation Intel Core platform (Haswell).

## Seealso

[Creating CHIPSEC modules and commands](#)

## OS Helpers and Drivers

Provide common interfaces to interact with system drivers/commands

### Mostly invoked by HAL modules

Directly invoking helpers from modules should be minimized

### Helpers import from BaseHelper

Override applicable functions – default is to generate exception

I/O, PCI, MSR, UEFI Variables, etc.

## Create a New Helper

Helper needs to be added into the helper folder with a folder structure like:

chipsec/helper/<type>/<type>helper.py

### Example

The new helper should be added to chipsec/helper/new/newhelper.py and should import from Helper Base Class

```
from chipsec.helper.basehelper import Helper
class NewHelper(Helper):

    def __init__(self):
        super(NewHelper, self).__init__()
        self.name = "NewHelper"
```

## Helper components

### chipsec.helper package

#### chipsec.helper.dal package

##### chipsec.helper.dal.dalhelper module

Intel DFX Abstraction Layer (DAL) helper

From the Intel(R) DFX Abstraction Layer Python\* Command Line Interface User Guide

#### chipsec.helper.efi package

##### chipsec.helper.efi.efihelper module

On UEFI use the efi package functions



## 41 - OS Helpers and Drivers

chipsec.helper.linux package

chipsec.helper.linux.linuxhelper module

Linux helper

chipsec.helper.linuxnative package

chipsec.helper.linuxnative.cpuid module

chipsec.helper.linuxnative.legacy\_pci module

chipsec.helper.linuxnative.linuxnativehelper module

Native Linux helper

chipsec.helper.windows package

chipsec.helper.windows.windowshelper module

chipsec.helper.basehelper module

chipsec.helper.nonehelper module

chipsec.helper.oshelper module

Abstracts support for various OS/environments, wrapper around platform specific code that invokes kernel driver

## Methods for Platform Detection

### Uses PCI VendorID and DeviceID to detect processor and PCH

Processor: 0:0:0

PCH: Scans enumerated PCI Devices for corresponding VID/DID per configurations.

### Chip information located in `chipsec/chipset.py`

Currently requires VID of 0x8086 (Intel) or 0x1022 (AMD).

DeviceID is used as the lookup key.

If there are matching DeviceID, will fall back to cpuid check for CPU.

## Platform Configuration Options

Select a specific platform using the `-p` flag.

Specify PCH using the `--pch` flag.

~Ignore the platform specific registers using the `-i` flag.~ The `-i` flag has been deprecated and should not be used.

## Sample module code template

```
from chipsec.module_common import BaseModule
from chipsec.library.returncode import ModuleResult

class ModuleClass(BaseModule):
    """Class name aligns with file name, eg ModuleClass.py"""
    def __init__(self):
        BaseModule.__init__(self)

    def is_supported(self) -> bool:
        """Module prerequisite checks"""
        if some_module_requirement():
            return True # Module is applicable
        self.res = ModuleResult.NOTAPPLICABLE
        return False # Module is not applicable

    def action(self) -> int:
        """Module test logic and methods as needed"""
        self.logger.log_passed('Module was successful!')
        return ModuleResult.PASSED

    def run(self, module_argv) -> int:
        """Primary module execution and result handling"""
        self.logger.start_test('Module Description')
        self.res = self.action()
        return self.res
```

# Util Command

```
# chipsec_util.py commands live in chipsec/utilcmd/
# Example file name: <command_display_name>_cmd.py

from argparse import ArgumentParser

from chipsec.command import BaseCommand, toLoad

class CommandClass(BaseCommand):
    """
    >>> chipsec_util command_display_name action
    """
    def requirements(self) -> toLoad:
        return toLoad.All

    def parse_arguments(self):
        parser = ArgumentParser(prog='chipsec_util command_display_name', usage=CommandClass.__doc__)
        subparsers = parser.add_subparsers()
        parser_entrypoint = subparsers.add_parser('action')
        parser_entrypoint.set_defaults(func=self.action)
        parser.parse_args(self.argv, namespace=self)

    def action(self):
        return

    def run(self):
        self.func()

commands = {'command_display_name': CommandClass}
```

# CHIPSEC Modules

A CHIPSEC module is just a python class that inherits from BaseModule and implements is\_supported and run. Modules are stored under the chipsec installation directory in a subdirectory “modules”. The “modules” directory contains one subdirectory for each chipset that chipsec supports. There is also a directory for common modules that should apply to every platform.

chipsec/modules/	modules including tests or tools (that’s where most of the chipsec functionality is)
chipsec/modules/common/	modules common to all platforms
chipsec/modules/<platform>/	modules specific to <platform>
chipsec/modules/tools/	security tools based on CHIPSEC framework (fuzzers, etc.)

Internally the chipsec application uses the concept of a module name, which is a string of the form: common.bios\_wp. This means module common.bios\_wp is a python script called bios\_wp.py that is stored at <ROOT\_DIR>\chipsec\modules\common\.

Modules can be mapped to one or more security vulnerabilities being checked. More information also found in the documentation for any individual module.

Known vulnerabilities can be mapped to CHIPSEC modules as follows:

Vulnerability Description	CHIPSEC Module	Example
SMI event configuration is not locked	common.bios_smi	
SPI flash descriptor is not protected	common.spi_desc	
SPI controller security override is enabled	common.spi_fdopss	
SPI flash controller is not locked	common.spi_lock	
Device-specific SPI flash protection is not used	chipsec_util spi write (manual analysis)	
SMM BIOS write protection is not correctly used	common.bios_wp	
Flash protected ranges do not protect bios region	common.bios_wp	
BIOS interface is not locked	common.bios_ts	

### Attack Surface/Vector: Runtime protection of SMRAM

Vulnerability Description	CHIPSEC Module	Example
Compatibility SMRAM is not locked	common.smm	
SMM cache attack	common.smrr	
Memory remapping vulnerability in SMM protection	remap	
DMA protections of SMRAM are not in use	smm_dma	
Graphics aperture redirection of SMRAM	chipsec_util memconfig remap	
Memory sinkhole vulnerability	tools.cpu.sinkhole	

### Attack Surface/Vector: Secure boot - Incorrect protection of secure boot configuration

Vulnerability Description	CHIPSEC Module	Example
Root certificate	common.bios_wp, common.secureboot.variables	
Key exchange keys	common.secureboot.variables	
Controls in setup variable (CSM enable/disable, image verification policies, secure boot enable/disable, clear/restore keys)	chipsec_util uefi var-find Setup	

TE header confusion	tools.secureboot.te	
UEFI NVRAM is not write protected	common.bios_wp	
Insecure handling of secure boot disable	chipsec_util uefi var-list	

### Attack Surface/Vector: Persistent firmware configuration

Vulnerability Description	CHIPSEC Module	Example
Secure boot configuration is stored in unprotected variable	common.secureboot.variables, chipsec_util uefi var-list	
Variable permissions are not set according to specification	common.uefi.access_uefispec	
Sensitive data (like passwords) are stored in uefi variables	chipsec_util uefi var-list (manual analysis)	
Firmware doesn't sanitize pointers/addresses stored in variables	chipsec_util uefi var-list (manual analysis)	
Firmware hangs on invalid variable content	chipsec_util uefi var-write, chipsec_util uefi var-delete (manual analysis)	
Hardware configuration stored in unprotected variables	chipsec_util uefi var-list (manual analysis)	
Re-creating variables with less restrictive permissions	chipsec_util uefi var-write (manual analysis)	
Variable NVRAM overflow	chipsec_util uefi var-write (manual analysis)	
Critical configuration is stored in unprotected CMOS	chipsec_util cmos, common.rtclock	

### Attack Surface/Vector: Platform hardware configuration

Vulnerability Description	CHIPSEC Module	Example
Boot block top-swap mode is not locked	common.bios_ts	
Architectural features not locked	common.ia32cfg	
Memory map is not locked	memconfig	
IOMMU usage	chipsec_util iommu	
Memory remapping is not locked	remap	

### Attack Surface/Vector: Runtime firmware (eg. SMI handlers)

Vulnerability Description	CHIPSEC Module	Example
SMI handlers use pointers/addresses from OS without validation	tools.smm.smm_ptr	
Legacy SMI handlers call legacy BIOS outside SMRAM		
INT15 in legacy SMI handlers		
UEFI SMI handlers call UEFI services outside SMRAM		
Malicious CommBuffer pointer and contents		
Race condition during SMI handler		
Authenticated variables SMI handler is not implemented	chipsec_util uefi var-write	
SmmRuntime vulnerability	tools.uefi.scan_blocked	

### Attack Surface/Vector: Boot time firmware

Vulnerability Description	CHIPSEC Module	Example
Software vulnerabilities when parsing, decompressing, and loading data from ROM		
Software vulnerabilities in implementation of digital signature verification		
Pointers stored in UEFI variables and used during boot	chipsec_util uefi var-write	
Loading unsigned PCI option ROMs	chipsec_util pci xrom	
Boot hangs due to error condition (eg. ASSERT)		

### Attack Surface/Vector: Power state transitions (eg. resume from sleep)

Vulnerability Description	CHIPSEC Module	Example
Insufficient protection of S3 boot script table	common.uefi.s3bootscript, tools.uefi.s3script_modify	
Dispatch opcodes in S3 boot script call functions in unprotected memory	common.uefi.s3bootscript, tools.uefi.s3script_modify	

## 47 - Util Command

S3 boot script interpreter stored in unprotected memory		
Pointer to S3 boot script table in unprotected UEFI variable	common.uefi.s3bootscript, tools.uefi.s3script_modify	
Critical setting not recorded in S3 boot script table	chipsec_util uefi s3bootscript (manual analysis)	
OS waking vector in ACPI tables can be modified	chipsec_util acpi dump (manual analysis)	
Using pointers on S3 resume stored in unprotected UEFI variables	chipsec_util uefi var-write	

### Attack Surface/Vector: Firmware update

Vulnerability Description	CHIPSEC Module	Example
Software vulnerabilities when parsing firmware updates		
Unauthenticated firmware updates		
Runtime firmware update that can be interrupted		
Signature not checked on capsule update executable		

### Attack Surface/Vector: Network interfaces

Vulnerability Description	CHIPSEC Module	Example
Software vulnerabilities when handling messages over network interfaces		
Booting unauthenticated firmware over unprotected network interfaces		

### Attack Surface/Vector: Misc

Vulnerability Description	CHIPSEC Module	Example
BIOS keyboard buffer is not cleared during boot	common.bios_kbrd_buffer	
DMA attack from devices during firmware execution		

## Modules

chipsec.modules package

chipsec.modules.bdw package

chipsec.modules.byt package

chipsec.modules.common package

chipsec.modules.common.cpu package

chipsec.modules.common.cpu.cpu\_info module

Displays CPU information

### Reference:

- **Intel 64 and IA-32 Architectures Software Developer Manual (SDM)**
- <https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html>

### Usage:

```
chipsec_main -m common.cpu.cpu_info
```

### Examples:

```
>>> chipsec_main.py -m common.cpu.cpu_info
```

### Registers used:

- IA32\_BIOS\_SIGN\_ID.MICROCODE

chipsec.modules.common.cpu.ia\_untrusted module

IA Untrusted checks

### Usage:

```
chipsec_main -m common.cpu.ia_untrusted
```

### Examples:

```
>>> chipsec_main.py -m common.cpu.ia_untrusted
```

### Registers used:



- MSR\_BIOS\_DONE.IA\_UNTRUSTED
- MSR\_BIOS\_DONE.SoC\_BIOS\_DONE

chipsec.modules.common.cpu.spectre\_v2 module

The module checks if system includes hardware mitigations for Speculative Execution Side Channel. Specifically, it verifies that the system supports CPU mitigations for Branch Target Injection vulnerability a.k.a. Spectre Variant 2 (CVE-2017-5715)

The module checks if the following hardware mitigations are supported by the CPU and enabled by the OS/software:

1. Indirect Branch Restricted Speculation (IBRS) and Indirect Branch Predictor Barrier (IBPB):  
CPUID.(EAX=7H,ECX=0):EDX[26] == 1
2. Single Thread Indirect Branch Predictors (STIBP): CPUID.(EAX=7H,ECX=0):EDX[27] == 1  
IA32\_SPEC\_CTRL[STIBP] == 1
3. Enhanced IBRS: CPUID.(EAX=7H,ECX=0):EDX[29] == 1 IA32\_ARCH\_CAPABILITIES[IBRS\_ALL] == 1  
IA32\_SPEC\_CTRL[IBRS] == 1
4. @TODO: Mitigation for Rogue Data Cache Load (RDCL): CPUID.(EAX=7H,ECX=0):EDX[29] == 1  
IA32\_ARCH\_CAPABILITIES[RDCL\_NO] == 1

In addition to checking if CPU supports and OS enables all mitigations, we need to check that relevant MSR bits are set consistently on all logical processors (CPU threads).

The module returns the following results:

**FAILED:**

IBRS/IBPB is not supported

**WARNING:**

IBRS/IBPB is supported

Enhanced IBRS is not supported

**WARNING:**

IBRS/IBPB is supported

Enhanced IBRS is supported

Enhanced IBRS is not enabled by the OS

**WARNING:**

IBRS/IBPB is supported

STIBP is not supported or not enabled by the OS

**PASSED:**

IBRS/IBPB is supported

Enhanced IBRS is supported

Enhanced IBRS is enabled by the OS

STIBP is supported

Notes:

- The module returns WARNING when CPU doesn't support enhanced IBRS Even though OS/software may use basic IBRS by setting IA32\_SPEC\_CTRL[IBRS] when necessary, we have no way to verify this

- The module returns WARNING when CPU supports enhanced IBRS but OS doesn't set IA32\_SPEC\_CTRL[IBRS] Under enhanced IBRS, OS can set IA32\_SPEC\_CTRL[IBRS] once to take advantage of IBRS protection
- The module returns WARNING when CPU doesn't support STIBP or OS doesn't enable it Per Speculative Execution Side Channel Mitigations: "enabling IBRS prevents software operating on one logical processor from controlling the predicted targets of indirect branches executed on another logical processor. For that reason, it is not necessary to enable STIBP when IBRS is enabled"
- OS/software may implement "retpoline" mitigation for Spectre variant 2 instead of using CPU hardware IBRS/IBPB

@TODO: we should verify CPUID.07H:EDX on all logical CPUs as well because it may differ if ucode update wasn't loaded on all CPU cores

Hardware registers used:

- CPUID.(EAX=7H,ECX=0):EDX[26] - enumerates support for IBRS and IBPB
- CPUID.(EAX=7H,ECX=0):EDX[27] - enumerates support for STIBP
- CPUID.(EAX=7H,ECX=0):EDX[29] - enumerates support for the IA32\_ARCH\_CAPABILITIES MSR
- IA32\_ARCH\_CAPABILITIES[IBRS\_ALL] - enumerates support for enhanced IBRS
- IA32\_ARCH\_CAPABILITIES[RCDL\_NO] - enumerates support RCDL mitigation
- IA32\_SPEC\_CTRL[IBRS] - enable control for enhanced IBRS by the software/OS
- IA32\_SPEC\_CTRL[STIBP] - enable control for STIBP by the software/OS

References:

- Reading privileged memory with a side-channel by Jann Horn, Google Project Zero: <https://googleprojectzero.blogspot.com/2018/01/reading-privileged-memory-with-side.html>
- Spectre: <https://spectreattack.com/spectre.pdf>
- Meltdown: <https://meltdownattack.com/meltdown.pdf>
- Speculative Execution Side Channel Mitigations: <https://software.intel.com/sites/default/files/managed/c5/63/336996-Speculative-Execution-Side-Channel-Mitigations.pdf>
- Retpoline: a software construct for preventing branch-target-injection: <https://support.google.com/faqs/answer/7625886>

chipsec.modules.common.secureboot package

chipsec.modules.common.secureboot.variables module

Verify that all Secure Boot key UEFI variables are authenticated (BS+RT+AT) and protected from unauthorized modification.

**Reference:**

- [UEFI 2.4 spec Section 28](#)

**Usage:**

```
chipsec_main -m common.secureboot.variables [-a modify] - -a : modify = will try to write/corrupt the variables
```

**Where:**

- [ ]: optional line

**Examples:**

```
>>> chipsec_main.py -m common.secureboot.variables
>>> chipsec_main.py -m common.secureboot.variables -a modify
```

**Note**

- Module is not supported in all environments.

chipsec.modules.common.uefi package

chipsec.modules.common.uefi.access\_uefispec module

Checks protection of UEFI variables defined in the UEFI spec to have certain permissions.

Returns failure if variable attributes are not as defined in [table 11 “Global Variables”](#) of the UEFI spec.

**usage:**

```
chipsec_main -m common.uefi.access_uefispec [-a modify[,attribute]]
```

- [-a modify[,attribute]]: Attempt to modify each variable in addition to checking attributes; optionally change the attribute as well

**Where:**

- [ ]: optional line

**Examples:**

```
>>> chipsec_main.py -m common.uefi.access_uefispec
>>> chipsec_main.py -m common.uefi.access_uefispec -a modify
>>> chipsec_main.py -m common.uefi.access_uefispec -a modify,7
```

NOTE: Requires an OS with UEFI Runtime API support.

chipsec.modules.common.uefi.s3bootscript module

Checks protections of the S3 resume boot-script implemented by the UEFI based firmware

**References:**

[VU#976132 UEFI implementations do not properly secure the EFI S3 Resume Boot Path boot script](#)

[Technical Details of the S3 Resume Boot Script Vulnerability](#) by Intel Security's Advanced Threat Research team.

[Attacks on UEFI Security](#) by Rafal Wojtczuk and Corey Kallenberg.

[Attacking UEFI Boot Script](#) by Rafal Wojtczuk and Corey Kallenberg.

[Exploiting UEFI boot script table vulnerability](#) by Dmytro Oleksiuk.

**Usage:**

```
chipsec_main.py -m common.uefi.s3bootscript [-a <script_address>]
```

- `-a <script_address>`: Specify the bootscript address

**Where:**

- `[ ]`: optional line

**Examples:**

```
>>> chipsec_main.py -m common.uefi.s3bootscript
>>> chipsec_main.py -m common.uefi.s3bootscript -a 0x00000000BDE10000
```

**Note**

Requires an OS with UEFI Runtime API support.

**chipsec.modules.common.bios\_kbrd\_buffer module**

Checks for exposure of pre-boot passwords (BIOS/HDD/pre-bot authentication SW) in the BIOS keyboard buffer.

**Reference:**

- DEFCON 16: [Bypassing Pre-boot Authentication Passwords by Instrumenting the BIOS Keyboard Buffer](#) by Jonathan Brossard

**Usage:**

```
chipsec_main -m common.bios_kbrd_buffer
```

**Examples:**

```
>>> chipsec_main.py -m common.bios_kbrd_buffer
```

**chipsec.modules.common.bios\_smi module**

The module checks that SMI events configuration is locked down - Global SMI Enable/SMI Lock - TCO SMI Enable/TCO Lock

**References:**

- [Setup for Failure: Defeating SecureBoot](#) by Corey Kallenberg, Xeno Kovah, John Butterworth, Sam Cornwell
- [Summary of Attacks Against BIOS and Secure Boot](#)

**Usage:**

```
chipsec_main -m common.bios_smi
```

**Examples:**

```
>>> chipsec_main.py -m common.bios_smi
```

**Registers used:**

- SmmBiosWriteProtection (Control)
- TCOSMILock (Control)
- SMILock (Control)
- BiosWriteEnable (Control)

chipsec.modules.common.bios\_ts module

Checks for BIOS Interface Lock including Top Swap Mode

**References:**

- [BIOS Boot Hijacking and VMware Vulnerabilities Digging](#) by Bing Sun

**Usage:**

```
chipsec_main -m common.bios_ts
```

**Examples:**

```
>>> chipsec_main.py -m common.bios_ts
```

**Registers used:**

- BiosInterfaceLockDown (control)
- TopSwapStatus (control)
- TopSwap (control)

chipsec.modules.common.bios\_wp module

The BIOS region in flash can be protected either using SMM-based protection or using configuration in the SPI controller. However, the SPI controller configuration is set once and locked, which would prevent writes later.

This module checks both mechanisms. In order to pass this test using SPI controller configuration, the SPI Protected Range registers (PR0-4) will need to cover the entire BIOS region. Often, if this configuration is used at all, it is used only to protect part of the BIOS region (usually the boot block). If other important data (eg. NVRAM) is not protected, however, some vulnerabilities may be possible.

[A Tale of One Software Bypass of Windows 8 Secure Boot](#) In a system where certain BIOS data was not protected, malware may be able to write to the Platform Key stored on the flash, thereby disabling secure boot.

SMM based write protection is controlled from the BIOS Control Register. When the BIOS Write Protect Disable bit is set (sometimes called BIOSWE or BIOS Write Enable), then writes are allowed. When cleared, it can also be locked with the BIOS Lock Enable (BLE) bit. When locked, attempts to change the WPD bit will result in generation of an SMI. This way, the SMI handler can decide whether to perform the write.

As demonstrated in the [Speed Racer](#) issue, a race condition may exist between the outstanding write and processing of the SMI that is generated. For this reason, the EISS bit (sometimes called SMM\_BWP or SMM BIOS Write Protection) must be set to ensure that only SMM can write to the SPI flash.

**References:**

- [A Tale of One Software Bypass of Windows 8 Secure Boot](#)
- [Speed Racer](#)

**Usage:**

```
chipsec_main -m common.bios_wp
```

**Examples:**

```
>>> chipsec_main.py -m common.bios_wp
```

**Registers used: (n = 0,1,2,3,4)**

- BiosLockEnable (Control)
- BiosWriteEnable (Control)

- SmmBiosWriteProtection (Control)
- PRn.PRB
- PRn.RPE
- PRn.PRL
- PRn.WPE

## Note

- Module will fail if SMM-based protection is not correctly configured and SPI protected ranges (PR registers) do not protect the entire BIOS region.

chipsec.modules.common.cet module

Reports CET Settings

### Usage:

```
chipsec_main -m common.cet
```

### Example:

```
>>> chipsec_main.py -m common.cet
```

## Note

- cpuid(7, 0) must return 1 at bit 7 to run
- IA32\_U\_CET and IA32\_S\_CET must be defined for addition information.
- Module is INFORMATION only and does NOT return a Pass/Fail

chipsec.modules.common.debugenabled module

This module checks if the system has debug features turned on, specifically the Direct Connect Interface (DCI).

This module checks the following bits: 1. HDCIEN bit in the DCI Control Register 2. Debug enable bit in the IA32\_DEBUG\_INTERFACE MSR 3. Debug lock bit in the IA32\_DEBUG\_INTERFACE MSR 4. Debug occurred bit in the IA32\_DEBUG\_INTERFACE MSR

### Usage:

```
chipsec_main -m common.debugenabled
```

### Examples:

```
>>> chipsec_main.py -m common.debugenabled
```

The module returns the following results:

- **FAILED** : Any one of the debug features is enabled or unlocked.
- **PASSED** : All debug feature are disabled and locked.

**Registers used:**

- IA32\_DEBUG\_INTERFACE[DEBUGENABLE]
- IA32\_DEBUG\_INTERFACE[DEBUGELOCK]
- IA32\_DEBUG\_INTERFACE[DEBUGEOCCURED]
- P2SB\_DCI.DCI\_CONTROL\_REG[HDCIEN]

chipsec.modules.common.ia32cfg module

Tests that IA-32/IA-64 architectural features are configured and locked, including IA32 Model Specific Registers (MSRs)

**Reference:**

- **Intel 64 and IA-32 Architectures Software Developer Manual (SDM)**
- <https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html>

**Usage:**

```
chipsec_main -m common.ia32cfg
```

**Examples:**

```
>>> chipsec_main.py -m common.ia32cfg
```

**Registers used:**

- IA32\_FEATURE\_CONTROL
- Ia32FeatureControlLock (control)

chipsec.modules.common.me\_mfg\_mode module

This module checks that ME Manufacturing mode is not enabled.

**References:**

<https://blog.ptsecurity.com/2018/10/intel-me-manufacturing-mode-macbook.html>

**PCI\_DEVS.H**

```
#define PCH_DEV_SLOT_CSE          0x16
#define PCH_DEVFN_CSE             _PCH_DEVFN(CSE, 0)
#define PCH_DEV_CSE               _PCH_DEV(CSE, 0)
```

<https://github.com/coreboot/coreboot/blob/master/src/soc/intel/apollolake/cse.c>

```
fwsts1 = dump_status(1, PCI_ME_HFSTS1);
# Minimal decoding is done here in order to call out most important
# pieces. Manufacturing mode needs to be locked down prior to shipping
# the product so it's called out explicitly.
printf(BIOS_DEBUG, "ME: Manufacturing Mode      : %s", (fwsts1 & (1 << 0x4)) ? "YES" : "NO");
```

**PCH.H**

```
#define PCH_ME_DEV                PCI_DEV(0, 0x16, 0)
```

**ME.H**

```
struct me_hfs {
    u32 working_state: 4;
    u32 mfg_mode: 1;
```

```

    u32 fpt_bad: 1;
    u32 operation_state: 3;
    u32 fw_init_complete: 1;
    u32 ft_bup_ld_flr: 1;
    u32 update_in_progress: 1;
    u32 error_code: 4;
    u32 operation_mode: 4;
    u32 reserved: 4;
    u32 boot_options_present: 1;
    u32 ack_data: 3;
    u32 bios_msg_ack: 4;
} __packed;

```

## ME\_STATUS.C

```

printfk(BIOS_DEBUG, "ME: Manufacturing Mode      : %s", hfs->mfg_mode ? "YES" : "NO");

```

This module checks the following:

HFS.MFG\_MODE BDF: 0:22:0 offset 0x40 - Bit [4]

### Usage:

```

chipsec_main -m common.me_mfg_mode

```

### Examples:

```

>>> chipsec_main.py -m common.me_mfg_mode

```

The module returns the following results:

FAILED : HFS.MFG\_MODE is set

PASSED : HFS.MFG\_MODE is not set.

### Hardware registers used:

- HFS.MFG\_MODE

## chipsec.modules.common.memconfig module

This module verifies memory map secure configuration, that memory map registers are correctly configured and locked down.

### Usage:

```

chipsec_main -m common.memconfig

```

### Example:

```

>>> chipsec_main.py -m common.memconfig

```

## Note

- This module will only run on Core (client) platforms.

## chipsec.modules.common.memlock module

This module checks if memory configuration is locked to protect SMM

### Reference:



- [https://github.com/coreboot/coreboot/blob/master/src/cpu/intel/model\\_206ax/finalize.c](https://github.com/coreboot/coreboot/blob/master/src/cpu/intel/model_206ax/finalize.c)
- <https://github.com/coreboot/coreboot/blob/master/src/soc/intel/broadwell/include/soc/msr.h>

This module checks the following: - LT\_LOCK\_MEMORY MSR (0x2E7) - Bit [0]

**The module returns the following results:**

- **FAILED** : LT\_LOCK\_MEMORY[0] is not set
- **PASSED** : LT\_LOCK\_MEMORY[0] is set
- **ERROR** : Problem reading LT\_LOCK\_MEMORY values

**Usage:**

```
chipsec_main -m common.memlock
```

**Example:**

```
>>> chipsec_main.py -m common.memlock
```

**Registers used:**

- LT\_LOCK\_MEMORY

## Note

- This module will not run on Atom based platforms.

chipsec.modules.common.remap module

Check Memory Remapping Configuration

**Reference:**

- [Preventing & Detecting Xen Hypervisor Subversions](#) by Joanna Rutkowska & Rafal Wojtczuk

**Usage:**

```
chipsec_main -m common.remap
```

**Example:**

```
>>> chipsec_main.py -m common.remap
```

**Registers used:**

- 8086.HOSTCTL.MCHBAR\*.REMAPBASE
- 8086.HOSTCTL.MCHBAR\*.REMAPLIMIT
- 8086.HOSTCTL.TOUUD
- 8086.HOSTCTL.TOLUD
- 8086.HOSTCTL.TSEGMB

## Note

- This module will only run on Core platforms.

**chipsec.modules.common.rom\_armor module**

This module verifies support for Rom Armor and SPI ROM protections.

Reference:

**usage:**

```
chipsec_main -m common.rom_armor
```

**Examples:**

```
>>> chipsec_main.py -m common.rom_armor
```

**chipsec.modules.common.rtclock module**

Checks for RTC memory locks. Since we do not know what RTC memory will be used for on a specific platform, we return WARNING (rather than FAILED) if the memory is not locked.

**Usage:**

```
chipsec_main -m common.rtclock [-a modify]
```

- -a modify: Attempt to modify CMOS values

**Examples:**

```
>>> chipsec_main.py -m common.rtclock
>>> chipsec_main.py -m common.rtclock -a modify
```

**Registers used:**

- RC.LL
- RC.UL

**Note**

- This module will only run on Core platforms

**chipsec.modules.common.sgx\_check module**

Check SGX related configuration

**Reference:**

- SGX BWG, CDI/IBP#: 565432

**Usage:**

```
chipsec_main -m common.sgx_check
```

**Examples:**

```
>>> chipsec_main.py -m common.sgx_check
```

**Registers used:**

- IA32\_FEATURE\_CONTROL.SGX\_GLOBAL\_EN
- IA32\_FEATURE\_CONTROL.LOCK
- IA32\_DEBUG\_INTERFACE.ENABLE

- IA32\_DEBUG\_INTERFACE.LOCK
- MTRRCAP.PRMRR
- PRMRR\_VALID\_CONFIG
- PRMRR\_PHYBASE.PRMRR\_BASE\_ADDRESS\_FIELDS
- PRMRR\_PHYBASE.PRMRR\_MEMTYPE
- PRMRR\_MASK.PRMRR\_mask\_bits
- PRMRR\_MASK.PRMRR\_VLD
- PRMRR\_MASK.PRMRR\_LOCK
- PRMRR\_UNCORE\_PHYBASE.PRMRR\_BASE\_ADDRESS\_FIELDS
- PRMRR\_UNCORE\_MASK.PRMRR\_mask\_bits
- PRMRR\_UNCORE\_MASK.PRMRR\_VLD
- PRMRR\_UNCORE\_MASK.PRMRR\_LOCK
- BIOS\_SE\_SVN.PFAT\_SE\_SVN
- BIOS\_SE\_SVN.ANC\_SE\_SVN
- BIOS\_SE\_SVN.SCLEAN\_SE\_SVN
- BIOS\_SE\_SVN.SINIT\_SE\_SVN
- BIOS\_SE\_SVN\_STATUS.LOCK
- SGX\_DEBUG\_MODE.SGX\_DEBUG\_MODE\_STATUS\_BIT

## Note

- Will not run within the EFI Shell

chipsec.modules.common.sgx\_check\_sidekick module

chipsec.modules.common.smm module

Compatible SMM memory (SMRAM) Protection check module This CHIPSEC module simply reads SMRAMC and checks that D\_LCK is set.

Reference: In 2006, [Security Issues Related to Pentium System Management Mode](#) outlined a configuration issue where compatibility SMRAM was not locked on some platforms. This means that ring 0 software was able to modify System Management Mode (SMM) code and data that should have been protected.

In Compatibility SMRAM (CSEG), access to memory is defined by the SMRAMC register. When SMRAMC[D\_LCK] is not set by the BIOS, SMRAM can be accessed even when the CPU is not in SMM. Such attacks were also described in [Using CPU SMM to Circumvent OS Security Functions](#) and [Using SMM for Other Purposes](#).

### usage:

```
chipsec_main -m common.smm
```

### Examples:

```
>>> chipsec_main.py -m common.smm
```

This module will only run on client (core) platforms that have SMRAMC defined.

chipsec.modules.common.smm\_addr module

#### CPU SMM Addr

This module checks to see that SMMMask has Tseg and Aseg programmed correctly. It also verifies that CPU access to SMM is blocked while not in SMM.

#### Usage:

```
chipsec_main -m common.smm_addr
```

#### Examples:

```
>>> chipsec_main.py -m common.smm_addr
```

#### Registers used:

AMD: - SMMMASK.TMTypeDram - SMMMASK.AMTypeDram - SMMMASK.TValid - SMMMASK.AValid  
- SMM\_BASE

chipsec.modules.common.smm\_close module

Compatible SMM memory (SMRAM) Protection check module This CHIPSEC module simply reads SMRAMC and checks that D\_LCK is set.

Reference: <https://www.amd.com/en/resources/product-security/bulletin/amd-sb-7014.html>

#### usage:

```
chipsec_main -m common.smm_close
```

#### Examples:

```
>>> chipsec_main.py -m common.smm_close
```

This module will only run on AMD platforms with SMMMask defined.

chipsec.modules.common.smm\_code\_chk module

#### SMM\_CODE\_CHK\_EN (SMM Call-Out) Protection check

SMM\_CODE\_CHK\_EN is a bit found in the SMM\_FEATURE\_CONTROL register. Once set to '1', any CPU that attempts to execute SMM code not within the ranges defined by the SMRR will assert an unrecoverable MCE. As such, enabling and locking this bit is an important step in mitigating SMM call-out vulnerabilities. This CHIPSEC module simply reads the register and checks that SMM\_CODE\_CHK\_EN is set and locked.

#### Reference:

- Intel 64 and IA-32 Architectures Software Developer Manual (SDM)
- <https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html>

#### Usage:

```
chipsec_main -m common.smm_code_chk
```

#### Examples:

```
>>> chipsec_main.py -m common.smm_code_chk
```

**Registers used:**

- SMM\_FEATURE\_CONTROL.LOCK
- SMM\_FEATURE\_CONTROL.SMM\_CODE\_CHK\_EN

**Note**

- SMM\_FEATURE\_CONTROL may not be defined or readable on all platforms.

chipsec.modules.common.smm\_dma module

**SMM TSEG Range Configuration Checks**

This module examines the configuration and locking of SMRAM range configuration protecting from DMA attacks. If it fails, then DMA protection may not be securely configured to protect SMRAM.

Just like SMRAM needs to be protected from software executing on the CPU, it also needs to be protected from devices that have direct access to DRAM (DMA). Protection from DMA is configured through proper programming of SMRAM memory range. If BIOS does not correctly configure and lock the configuration, then malware could reprogram configuration and open SMRAM area to DMA access, allowing manipulation of memory that should have been protected.

**References:**

- [System Management Mode Design and Security Issues](#)
- [Summary of Attack against BIOS and Secure Boot](#)

**Usage:**

```
chipsec_main -m smm_dma
```

**Examples:**

```
>>> chipsec_main.py -m smm_dma
```

**Registers used:**

- TSEGBaseLock (control)
- TSEGLimitLock (control)
- MSR\_BIOS\_DONE.IA\_UNTRUSTED
- PCI0.0.0\_TSEGMB.TSEGMB
- PCI0.0.0\_BGSM.BGSM
- IA32\_SMRR\_PHYSBASE.PHYSBASE
- IA32\_SMRR\_PHYSMASK.PHYSMASK

**Supported Platforms:**

- Core (client)

chipsec.modules.common.smm\_lock module

Compatible SMM memory (SMRAM) Protection check module This CHIPSEC module simply reads HWCR and checks that D\_LCK is set.

## 62 - Util Command

Reference:

### usage:

```
chipsec_main -m common.smm_lock
```

### Examples:

```
>>> chipsec_main.py -m common.smm_lock
```

This module will only run on platforms that have HWCR defined.

chipsec.modules.common.smrr module

## CPU SMM Cache Poisoning / System Management Range Registers check

This module checks to see that SMRRs are enabled and configured.

### Reference:

Researchers demonstrated a way to use CPU cache to effectively change values in SMRAM in [Attacking SMM Memory via Intel CPU Cache Poisoning](#) and [Getting into the SMRAM: SMM Reloaded](#) . If ring 0 software can make SMRAM cacheable and then populate cache lines at SMBASE with exploit code, then when an SMI is triggered, the CPU could execute the exploit code from cache. System Management Mode Range Registers (SMRRs) force non-cachable behavior and block access to SMRAM when the CPU is not in SMM. These registers need to be enabled/configured by the BIOS.

### Usage:

```
chipsec_main -m common.smrr [-a modify]
```

- -a modify: Attempt to modify memory at SMRR base

### Examples:

```
>>> chipsec_main.py -m common.smrr
>>> chipsec_main.py -m common.smrr -a modify
```

### Registers used:

- IA32\_SMRR\_PHYSBASE.PHYSBASE
- IA32\_SMRR\_PHYSBASE.TYPE
- IA32\_SMRR\_PHYSMASK.PHYSMASK
- IA32\_SMRR\_PHYSMASK.VALID

chipsec.modules.common.spd\_wd module

This module checks that SPD Write Disable bit in SMBus controller has been set

### References:

Intel 8 Series/C220 Series Chipset Family Platform Controller Hub datasheet Intel 300 Series Chipset Families Platform Controller Hub datasheet

This module checks the following:

HCFG.SPD\_WD

The module returns the following results:

PASSED : HCFG.SPD\_WD is set

FAILED : HCFG.SPD\_WD is not set and SPDs were detected

INFORMATION: HCFG.SPD\_WD is not set, but no SPDs were detected

## 63 - Util Command

Hardware registers used:

HCFG

### Usage:

```
chipsec_main -m common.spd_wd
```

### Examples:

```
>>> chipsec_main.py -m common.spd_wd
```

## Note

**This module will only run if:**

- SMBUS device is enabled
- HCFG.SPD\_WD is defined for the platform

chipsec.modules.common.spi\_access module

SPI Flash Region Access Control

Checks SPI Flash Region Access Permissions programmed in the Flash Descriptor

### Usage:

```
chipsec_main -m common.spi_access
```

### Examples:

```
>>> chipsec_main.py -m common.spi_access
```

### Registers used:

- 8086.SPI.HSFS.FDV
- 8086.SPI.FRAP.BRWA

## Important

- Some platforms may use alternate means of protecting these regions. Consider this when assessing results.

chipsec.modules.common.spi\_desc module

The SPI Flash Descriptor indicates read/write permissions for devices to access regions of the flash memory. This module simply reads the Flash Descriptor and checks that software cannot modify the Flash Descriptor itself. If software can write to the Flash Descriptor, then software could bypass any protection defined by it. While often used for debugging, this should not be the case on production systems.

This module checks that software cannot write to the flash descriptor.

### Usage:

```
chipsec_main -m common.spi_desc
```

### Examples:

```
>>> chipsec_main.py -m common.spi_desc
```

**Registers used:**

- FRAP.BRRA
- FRAP.BRWA

chipsec.modules.common.spi\_fdopss module

Checks for SPI Controller Flash Descriptor Security Override Pin Strap (FDOPSS). On some systems, this may be routed to a jumper on the motherboard.

**Usage:**

```
chipsec_main -m common.spi_fdopss
```

**Examples:**

```
>>> chipsec_main.py -m common.spi_fdopss
```

**Registers used:**

- HSFS.FDOPSS

chipsec.modules.common.spi\_lock module

The configuration of the SPI controller, including protected ranges (PR0-PR4), is locked by HSFS[FLOCKDN] until reset. If not locked, the controller configuration may be bypassed by reprogramming these registers.

This vulnerability (not setting FLOCKDN) is also checked by other tools, including [flashrom](#) and Copernicus by MITRE.

This module checks that the SPI Flash Controller configuration is locked.

**Reference:**

- [flashrom](#)
- [Copernicus: Question Your Assumptions about BIOS Security](#)

**Usage:**

```
chipsec_main -m common.spi_lock
```

**Examples:**

```
>>> chipsec_main.py -m common.spi_lock
```

**Registers used:**

- FlashLockDown (control)
- SpiWriteStatusDis (control)



chipsec.modules.tools package

chipsec.modules.tools.cpu package

chipsec.modules.tools.cpu.sinkhole module

This module checks if CPU is affected by 'The SMM memory sinkhole' vulnerability

#### References:

- [Memory Sinkhole presentation by Christopher Domas](#)
- [Memory Sinkhole whitepaper](#)

#### Usage:

```
chipsec_main -m tools.cpu.sinkhole
```

#### Examples:

```
>>> chipsec_main.py -m tools.cpu.sinkhole
```

#### Registers used:

- IA32\_APIC\_BASE.APICBase
- IA32\_SMRR\_PHYSBASE.PHYSBASE
- IA32\_SMRR\_PHYSMASK

### Note

- Supported OS: Windows or Linux

### Warning

- The system may hang when running this test.
- In that case, the mitigation to this issue is likely working but we may not be handling the exception generated.

chipsec.modules.tools.secureboot package

chipsec.modules.tools.secureboot.te module

Tool to test for 'TE Header' vulnerability in Secure Boot implementations as described in [All Your Boot Are Belong To Us](#)

#### Usage:

```
chipsec_main.py -m tools.secureboot.te [-a <mode>,<cfg_file>,<efi_file>]
```

- `<mode>`
  - `generate_te` (default) convert PE EFI binary `<efi_file>` to TE binary
  - `replace_bootloader` replace bootloader files listed in `<cfg_file>` on ESP with modified `<efi_file>`
  - `restore_bootloader` restore original bootloader files from `.bak` files
- `<cfg_file>` path to config file listing paths to bootloader files to replace
- `<efi_file>` path to EFI binary to convert to TE binary. If no file path is provided, the tool will look for `Shell.efi`

Examples:

Convert `Shell.efi` PE/COFF EFI executable to TE executable:

```
chipsec_main.py -m tools.secureboot.te -a generate_te,Shell.efi
```

Replace bootloaders listed in `te.cfg` file with TE version of `Shell.efi` executable:

```
chipsec_main.py -m tools.secureboot.te -a replace_bootloader,te.cfg,Shell.efi
```

Restore bootloaders listed in `te.cfg` file:

```
chipsec_main.py -m tools.secureboot.te -a restore_bootloader,te.cfg
```

chipsec.modules.tools.smm package

chipsec.modules.tools.smm.rogue\_mmio\_bar module

chipsec.modules.tools.smm.smm\_ptr module

A tool to test SMI handlers for pointer validation vulnerabilities

#### Reference:

- **Presented in CanSecWest 2015:**

- [c7zero.info: A New Class of Vulnerability in SMI Handlers of BIOS/UEFI Firmware](#)

Usage: `chipsec_main -m tools.smm.smm_ptr -l log.txt \`  
`[-a <mode>,<config_file>|<smic_start:smic_end>,<size>,<address>]`

- `mode`: SMI fuzzing mode
  - `config` = use SMI configuration file `<config_file>`
  - `fuzz` = fuzz all SMI handlers with code in the range `<smic_start:smic_end>`
  - `fuzzmore` = fuzz mode + pass 2nd-order pointers within buffer to SMI handlers
  - `scan` = fuzz mode + time measurement to identify SMIs that trigger long-running code paths
- `size`: size of the memory buffer (in Hex)
- `address`: physical address of memory buffer to pass in GP regs to SMI handlers (in Hex)

- smram = option passes address of SMRAM base (system may hang in this mode!)

In config mode, SMI configuration file should have the following format

```
SMI_code=<SMI code> or *
SMI_data=<SMI data> or *
RAX=<value of RAX> or * or PTR or VAL
RBX=<value of RBX> or * or PTR or VAL
RCX=<value of RCX> or * or PTR or VAL
RDX=<value of RDX> or * or PTR or VAL
RSI=<value of RSI> or * or PTR or VAL
RDI=<value of RDI> or * or PTR or VAL
[PTR_OFFSET=<offset to pointer in the buffer>]
[SIG=<signature>]
[SIG_OFFSET=<offset to signature in the buffer>]
[Name=<SMI name>]
[Desc=<SMI description>]
```

Where:

- [ ]: optional line
- \*: Don't Care (the module will replace \* with 0x0)
- PTR: Physical address SMI handler will write to (the module will replace PTR with physical address provided as a command-line argument)
- VAL: Value SMI handler will write to PTR address (the module will replace VAL with hardcoded \_FILL\_VALUE\_xx)

Examples:

```
>>> chipsec_main.py -m tools.smm.smm_ptr
>>> chipsec_main.py -m tools.smm.smm_ptr -a fuzzmore,0x0:0xFF -l smm.log
>>> chipsec_main.py -m tools.smm.smm_ptr -a scan,0x0:0xff
```

## Warning

- This is a potentially destructive test

chipsec.modules.tools.uefi package

chipsec.modules.tools.uefi.reputation module

chipsec.modules.tools.uefi.s3script\_modify module

This module will attempt to modify the S3 Boot Script on the platform. Doing this could cause the platform to malfunction. Use with care!

### Usage:

Replacing existing opcode:

```
chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,<reg_opcode>,<address>,<value>
<reg_opcode> = pci_wr|mmio_wr|io_wr|pci_rw|mmio_rw|io_rw
```

```
chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,mem[,<address>,<value>]

chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,dispatch``

chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,dispatch_ep``
```

Adding new opcode:

```
chipsec_main.py -m tools.uefi.s3script_modify -a add_op,<reg_opcode>,<address>,<value>,<width>
    <reg_opcode> = pci_wr|mmio_wr|io_wr

chipsec_main.py -m tools.uefi.s3script_modify -a add_op,dispatch[,<entrypoint>]
```

Examples:

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,<reg_opcode>,<address>,<value>
>>> <reg_opcode> = pci_wr|mmio_wr|io_wr|pci_rw|mmio_rw|io_rw
```

The option will look for a script opcode that writes to PCI config, MMIO or I/O registers and modify the opcode to write the given value to the register with the given address.

After executing this, if the system is vulnerable to boot script modification, the hardware configuration will have changed according to given <reg\_opcode>.

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,mem
```

The option will look for a script opcode that writes to memory and modify the opcode to write the given value to the given address.

By default this test will allocate memory and write write 0xB007B007 that location.

After executing this, if the system is vulnerable to boot script modification, you should find the given value in the allocated memory location.

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,dispatch
```

The option will look for a dispatch opcode in the script and modify the opcode to point to a different entry point. The new entry point will contain a HLT instruction.

After executing this, if the system is vulnerable to boot script modification, the system should hang on resume from S3.

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a replace_op,dispatch_ep
```

The option will look for a dispatch opcode in the script and will modify memory at the entry point for that opcode. The modified instructions will contain a HLT instruction.

After executing this, if the system is vulnerable to dispatch opcode entry point modification, the system should hang on resume from S3.

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a add_op,<reg_opcode>,<address>,<value>,<width>
>>> <reg_opcode> = pci_wr|mmio_wr|io_wr
```

The option will add a new opcode which writes to PCI config, MMIO or I/O registers with specified values.

```
>>> chipsec_main.py -m tools.uefi.s3script_modify -a add_op,dispatch
```

The option will add a new DISPATCH opcode to the script with entry point to either existing or newly allocated memory.

```
chipsec.modules.tools.uefi.scan_blocked module
```

```
chipsec.modules.tools.uefi.scan_image module
```

```
chipsec.modules.tools.uefi.uefivar_fuzz module
```

The module is fuzzing UEFI Variable interface.

The module is using UEFI SetVariable interface to write new UEFI variables to SPI flash NVRAM with randomized name/attributes/GUID/data/size.

#### Usage:

```
chipsec_main -m tools.uefi.uefivar_fuzz [-a <options>]
```

Options:

```
[-a <test>,<iterations>,<seed>,<test_case>]
```

- `test` : UEFI variable interface to fuzz (all, name, guid, attrib, data, size)
- `iterations` : Number of tests to perform (default = 1000)
- `seed` : RNG seed to use
- `test_case` : Test case # to skip to (combined with seed, can be used to skip to failing test)

All module arguments are optional

#### Examples::

```
>>> chipsec_main.py -m tools.uefi.uefivar_fuzz
>>> chipsec_main.py -m tools.uefi.uefivar_fuzz -a all,100000
>>> chipsec_main.py -m tools.uefi.uefivar_fuzz -a data,1000,123456789
>>> chipsec_main.py -m tools.uefi.uefivar_fuzz -a name,1,123456789,94
```

### Note

- This module returns a WARNING by default to indicate that a manual review is needed.
- Writes may generate 'ERROR's, this can be expected behavior if the environment rejects them.

### Warning

- This module modifies contents of non-volatile SPI flash memory (UEFI Variable NVRAM).
- This may render system UNBOOTABLE if firmware doesn't properly handle variable update/delete operations.

### Important

- Evaluate the platform for expected behavior to determine PASS/FAIL.
- Behavior can include platform stability and retaining protections.

## 70 - Util Command

```
chipsec.modules.tools.vmm package
```

```
chipsec.modules.tools.vmm.hv package
```

```
chipsec.modules.tools.vmm.hv.define module
```

Hyper-V specific defines

```
chipsec.modules.tools.vmm.hv.hypercall module
```

Hyper-V specific hypercall functionality

```
chipsec.modules.tools.vmm.hv.hypercallfuzz module
```

Hyper-V hypercall fuzzer

### Usage:

```
chipsec_main.py -i -m tools.vmm.hv.hypercall -a <mode>[,<vector>,<iterations>  
>] -l log.txt
```

- **mode** fuzzing mode
  - = `status-fuzzing` finding parameters with hypercall success status
  - = `params-info` shows input parameters valid ranges
  - = `params-fuzzing` parameters fuzzing based on their valid ranges
  - = `custom-fuzzing` fuzzing of known hypercalls
- **vector** hypercall vector
- **iterations** number of hypercall iterations

Note: the fuzzer is incompatible with native VMBus driver (`vmbus.sys`). To use it, remove `vmbus.sys`

## 71 - Util Command

```
chipsec.modules.tools.vmm.hv.synth_dev module
```

```
chipsec.modules.tools.vmm.hv.synth_kbd module
```

```
chipsec.modules.tools.vmm.hv.vmbus module
```

```
chipsec.modules.tools.vmm.hv.vmbusfuzz module
```

```
chipsec.modules.tools.vmm.vbox package
```

```
chipsec.modules.tools.vmm.vbox.vbox_crash_apicbase module
```

Oracle VirtualBox CVE-2015-0377 check

### Reference:

- PoC test for Host OS Crash when writing to IA32\_APIC\_BASE MSR (Oracle VirtualBox CVE-2015-0377)
- <http://www.oracle.com/technetwork/topics/security/cpujan2015-1972971.html>

### Usage:

```
chipsec_main.py -i -m tools.vmm.vbox_crash_apicbase
```

### Examples:

```
>>> chipsec_main.py -i -m tools.vmm.vbox_crash_apicbase
```

### Registers used:

- IA32\_APIC\_BASE

## Warning

- Module can cause VMM/Host OS to crash; if so, this is a FAILURE

```
chipsec.modules.tools.vmm.xen package
```

```
chipsec.modules.tools.vmm.xen.define module
```

Xen specific defines

chipsec.modules.tools.vmm.xen.hypercall module

Xen specific hypercall functionality

chipsec.modules.tools.vmm.xen.hypercallfuzz module

Xen hypercall fuzzer

**Usage:**

```
chipsec_main.py -i -m tools.vmm.xen.hypercallfuzz -a <mode>[,<vector>,<iterations>]
```

- mode : fuzzing mode
  - help : Prints this help
  - info : Hypervisor information
  - fuzzing : Fuzzing specified hypercall
  - fuzzing-all : Fuzzing all hypercalls
  - fuzzing-all-randomly : Fuzzing random hypercalls
- <vector> : Code or name of a hypercall to be fuzzed (use info)
- <iterations> : Number of fuzzing iterations

**Examples:**

```
>>> chipsec_main.py -i -m tools.vmm.xen.hypercallfuzz -a fuzzing,10 -l log.txt
>>> chipsec_main.py -i -m tools.vmm.xen.hypercallfuzz -a fuzzing-all,50 -l log.txt
>>> chipsec_main.py -i -m tools.vmm.xen.hypercallfuzz -a fuzzing-all-randomly,10,0x10000000 -l log.txt
```

**Note**

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

**Important**

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.xen.xsa188 module

chipsec.modules.tools.vmm.cpuid\_fuzz module

Simple CPUID VMM emulation fuzzer

**Usage:**



## 73 - Util Command

```
chipsec_main.py -i -m tools.vmm.cpuid_fuzz [-a random]
```

- `random` : Fuzz in random order (default is sequential)

### Where:

- `[ ]`: optional line

### Examples:

```
>>> chipsec_main.py -i -m tools.vmm.cpuid_fuzz
>>> chipsec_main.py -i -m tools.vmm.cpuid_fuzz -l log.txt
>>> chipsec_main.py -i -m tools.vmm.cpuid_fuzz -a random
```

### Additional options set within the module:

- `_NO_EAX_TO_FUZZ` : No of EAX values to fuzz within each step
- `_EAX_FUZZ_STEP` : Step to fuzz range of EAX values
- `_NO_ITERATIONS_TO_FUZZ` : Number of iterations if *random* chosen
- `_FUZZ_ECX_RANDOM` : Fuzz ECX with random values?
- `_MAX_ECX` : Max ECX value
- `_EXCLUDE_CPUID` : Exclude the following EAX values from fuzzing
- `_FLUSH_LOG_EACH_ITER` : Flush log file after each iteration
- `_LOG_OUT_RESULTS` : Log output results

### Note

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

### Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.ept\_finder module

### Extended Page Table (EPT) Finder

#### Usage:

```
chipsec_main -m tools.vmm.ept_finder [-a dump,<file_name>|file,<file_name>,<revision_id>]
```

- `dump` : Dump contents
- `file` : Load contents from file
- `<file_name>` : File name to read from or dump to
- `<revision_id>` : Revision ID (hex)

**Where:**

- [ ]: optional line

**Examples:**

```
>>> chipsec_main.py -i -m tools.vmm.ept_finder
>>> chipsec_main.py -i -m tools.vmm.ept_finder -a dump,my_file.bin
>>> chipsec_main.py -i -m tools.vmm.ept_finder -a file,my_file.bin,0x0
```

## Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.hypercallfuzz module

chipsec.modules.tools.vmm.iofuzz module

Simple port I/O VMM emulation fuzzer

**Usage:**

```
chipsec_main.py -i -m tools.vmm.iofuzz [-a <mode>,<count>,<iterations>]
```

- <mode> : *SMI handlers testing mode*
  - exhaustive : Fuzz all I/O ports exhaustively (default)
  - random : Fuzz randomly chosen I/O ports
- <count> : Number of times to write to each port (default = 1000)
- <iterations> : Number of I/O ports to fuzz (default = 1000000 in random mode)

**Where:**

- [ ]: optional line

**Examples:**

```
>>> chipsec_main.py -i -m tools.vmm.iofuzz
>>> chipsec_main.py -i -m tools.vmm.iofuzz -a random,9000,4000000
```

**Additional options set within the module:**

- MAX\_PORTS : Maximum ports
- MAX\_PORT\_VALUE : Maximum port value to use
- DEFAULT\_PORT\_WRITE\_COUNT : Default port write count if not specified with switches
- DEFAULT\_RANDOM\_ITERATIONS : Default port write iterations if not specified with switches
- \_FLUSH\_LOG\_EACH\_ITER : Flush log after each iteration
- \_FUZZ\_SPECIAL\_VALUES : Specify to use 1-2-4 byte values
- \_EXCLUDE\_PORTS : Ports to exclude (list)

## Note

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

## Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.msr\_fuzz module

Simple CPU Module Specific Register (MSR) VMM emulation fuzzer

### Usage:

```
chipsec_main -m tools.vmm.msr_fuzz [-a random]
```

- -a : random = use random values (default = sequential numbering)

### Where:

- [ ]: optional line

### Examples:

```
>>> chipsec_main.py -i -m tools.vmm.msr_fuzz
>>> chipsec_main.py -i -m tools.vmm.msr_fuzz -a random
```

### Additional options set within the module:

- `_NO_ITERATIONS_TO_FUZZ` : Number of iterations to fuzz randomly
- `_READ_MSR` : Specify to read MSR when fuzzing it
- `_FLUSH_LOG_EACH_MSR` : Flush log file before each MSR
- `_FUZZ_VALUE_0_all1s` : Try all 0 & all 1 values to be written to each MSR
- `_FUZZ_VALUE_5A` : Try 0x5A values to be written to each MSR
- `_FUZZ_VALUE_RND` : Try random values to be written to each MSR
- `_EXCLUDE_MSR` : MSR values to exclude (list)

## Note

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

## Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.pcie\_fuzz module

Simple PCIe device Memory-Mapped I/O (MMIO) and I/O ranges VMM emulation fuzzer

#### Usage:

```
chipsec_main -m tools.vmm.pcie_fuzz [-a <bus> <dev> <fun>]
```

- <bus> : Bus # to fuzz (in hex)
- <dev> : Device # to fuzz (in hex)
- <fun> : Function # to fuzz (in hex)

#### Where:

- [ ]: optional line

#### Examples:

```
>>> chipsec_main.py -i -m tools.vmm.pcie_fuzz
>>> chipsec_main.py -i -m tools.vmm.pcie_fuzz -l log.txt
>>> chipsec_main.py -i -m tools.vmm.pcie_fuzz -a 0 1f 0
```

#### Additional options set within the module:

- IO\_FUZZ : Set to fuzz IO BARs
- CALC\_BAR\_SIZE : Set to calculate BAR sizes
- TIMEOUT : Timeout between memory writes (seconds)
- ACTIVE\_RANGE : Set to fuzz MMIO BAR in Active range
- BIT\_FLIP : Set to fuzz using bit flips
- \_EXCLUDE\_BAR : BARs to exclude (list)

### Note

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

### Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.vmm.pcie\_overlap\_fuzz module

chipsec.modules.tools.vmm.venom module

QEMU VENOM vulnerability DoS PoC test

**Reference:**

- Module is based on [PoC by Marcus Meissner](#)
- [VENOM: QEMU vulnerability \(CVE-2015-3456\)](#)

**Usage:**

```
chipsec_main.py -i -m tools.vmm.venom
```

**Examples:**

```
>>> chipsec_main.py -i -m tools.vmm.venom
```

**Additional options set within the module:**

- ITER\_COUNT : Iteration count
- FDC\_PORT\_DATA\_FIFO : FDC DATA FIFO port
- FDC\_CMD\_WVAL : FDC Command write value
- FD\_CMD : FD Command

## Note

- Returns a Warning by default
- System may be in an unknown state, further evaluation may be needed

## Important

- This module is designed to run in a VM environment
- Behavior on physical HW is undefined

chipsec.modules.tools.wsmt module

The Windows SMM Security Mitigation Table (WSMT) is an ACPI table defined by Microsoft that allows system firmware to confirm to the operating system that certain security best practices have been implemented in System Management Mode (SMM) software.

**Reference:**

- See <https://docs.microsoft.com/en-us/windows-hardware/design/device-experiences/oem-uefi-wsmt> for more details.

**Usage:**

```
chipsec_main -m common.wsmt
```

**Examples:**

```
>>> chipsec_main.py -m common.wsmc
```

## Note

- Analysis is only necessary if Windows is the primary OS

# Contribution and Style Guides

## Python Version

All Python code, and PEP support, must to be limited to the features supported by **Python 3.6.8**.

This is earliest version of Python utilized by CHIPSEC, the version of the EFI Shell Python.

## Python Coding Style Guide

CHIPSEC mostly follows the PEP8 with some exceptions. This attempts to highlight those as well as clarify others.

Consistency and readability are the goal but not at the expense of readability or functionality.

If in doubt, follow the existing code style and formatting.

### 1. PEP8

PEP 8 is a set of recommended code style guidelines (conventions) for Python.

[PEP 8](#)

### 2. Linting tools

CHIPSEC includes a Flake8 configuration file

[CHIPSEC flake8 config](#)

### 3. Zen of Python

Great philosophy around Python building principles.

[PEP 20](#)

### 4. Headers and Comments

Use single line comments, a single hash/number sign/octothorpe '#'.

Should contain a space immediately after the '#'.

```
# Good header comment
```

### 5. Single vs Double Quotes

Single quotes are encouraged but can vary with use case.

Avoid using backslashes `\` in strings.

```
'This is a preferred "string".'
```

```
"Also an acceptable 'string'."
```

```
"Avoid making this \"string\"."
```

## 6. Imports

### Import order:

1. Python standard library
2. Third-party imports
3. CHIPSEC and local application imports

Avoid using `import *` or `from import *`. This could pollute the namespace.

```
# Good
import sys
from chipsec.module_common import BaseModule
from chipsec.library.returncode import ModuleResult

# Bad - using '*' and importing sys after local imports
import *
from chipsec.module_common import *
import sys
```

Avoid using `from __future__` imports. These may not work on older or all interpreter versions required in all supported environments.

## 7. Line Length

Maximum line length should be 120 characters.

If at or near this limit, consider rewriting (eg simplifying) the line instead of breaking it into multiple lines.

Long lines can be an indication that too many things are happening at once and/or difficult to read.

## 8. Class Names

HAL and utilcmd **classes** should use **UpperCamelCase (PascalCase)** Words and acronyms are capitalized with no spaces or underscores.

Test **module** class names MUST match the module name which are typically **snake\_case**

## 9. Constants

Constants should use **CAPITALIZATION\_WITH\_UNDERSCORES**

## 10 Variable Names

- Variable names should use **snake\_case**
- Lower-case text with underscores between words.

## 11 Local Variable Names (private)

- Prefixed with an underscore, **\_private\_variable**
- Not a hard rule but will help minimize any variable name collisions with upstream namespace.

## 12 Dunder (double underscore)

- Avoid using `__dunders__` when naming variables. Should be used for functions that overwrite or add to classes and only as needed.
- Dunders utilize double (two) underscore characters before and after the name.

### 13 Code Indents

- CHIPSEC uses 4 space 'tabbed' indents.

No mixing spaces and tabs.

- 1 indent = 4 spaces
- No tabs

Recommend updating any IDE used to use 4 space indents by default to help avoid mixing tabs with spaces in the code.

### 14 Operator Precedence, Comparisons, and Parentheses

- If in doubt, wrap evaluated operators into logical sections if using multiple operators or improves readability.

While not needed in most cases, it can improve readability and limit the possibility of 'left-to-right chaining' issues.

```
# Preferred
if (test1 == True) or (test2 in data_list):
    return True

# Avoid. Legal but behavior may not be immediately evident.
if True is False == False:
    return False
```

### 15 Whitespace

- No whitespace inside parentheses, brackets, or braces.

No whitespace before a comma, colon, or semicolons.

Use whitespace after a comma, colon, or semicolon.

Use whitespace around operators: +, -, \*, \*\*, /, //, %, =, ==, <, >, <=, >=, <>, !=, is, in, is not, not in, <<, >>, &, |, ^

No trailing whitespace.

### 16 Non-ASCII Characters

- If including any non-ASCII characters anywhere in a python file, include the python encoding comment at the beginning of the file.

```
# -*- coding: utf-8 -*-
```

No non-ASCII class, function, or variable names.

### 17 Docstrings

- Use three double-quotes for all docstrings.

```
"""String description docstring."""
```

### 18 Semicolons

- Do not use semicolons.

### 19 Try Except

- Avoid using nested try-except.

The routine you are calling, may already be using one.

### 20 Avoid for-else and while-else loops

- The loop behavior for these can be counterintuitive.

If they have to be used, make sure to properly document the expected behavior / work-flow.



## f-Strings

### PEP versions supported by CHIPSEC

PEP / bpo	Title	Summary	Python Version	Supported
<a href="#">PEP 498</a>	Literal String Interpolation	Adds a new string formatting mechanism: Literal String Interpolation, f-strings	3.6	Yes
<a href="#">bpo 36817</a>	Add = to f-strings for easier debugging	f-strings support = for self-documenting expressions	3.8	No
<a href="#">PEP 701</a>	Syntactic formalization of f-strings	Lift some restrictions from PEP 498 and formalize grammar for f-strings	3.12	No

## Type Hints

**For more information on Python Type Hints:**

[PEP 483 - The Theory of Type Hints](#)

This table lists which Type Hint PEPs are in scope for CHIPSEC.

### PEP versions supported by CHIPSEC

PEP	Title	Summary	Python Version	Supported
<a href="#">PEP 3107</a>	Function Annotations	Syntax for adding arbitrary metadata annotations to Python functions	3.0	Yes
<a href="#">PEP 362</a>	Function Signature Object	Contains all necessary information about a function and its parameters	3.3	Yes
<a href="#">PEP 484</a>	Type Hints	Standard syntax for type annotations	3.5	Yes
<a href="#">PEP 526</a>	Syntax for Variable Annotations	Adds syntax for annotating the types of variables	3.6	Yes
<a href="#">PEP 544</a>	Protocols: Structural subtyping (static duck typing)	Specify type metadata for static type checkers and other third-party tools	3.8	No

<a href="#">PEP 585</a>	Type Hinting Generics In Standard Collections	Enable support for the generics syntax in all standard collections currently available in the typing module	3.9	No
<a href="#">PEP 586</a>	Literal Types	Literal types indicate that some expression has literally a specific value(s).	3.8	No
<a href="#">PEP 589</a>	TypedDict: Type Hints for Dictionaries with a Fixed Set of Keys	Support dictionary object with a specific set of string keys, each with a value of a specific type	3.8	No
<a href="#">PEP 593</a>	Flexible function and variable annotations	Adds an Annotated type to the typing module to decorate existing types with context-specific metadata.	3.9	No
<a href="#">PEP 604</a>	Allow writing union types as X   Y	Overload the   operator on types to allow writing Union[X, Y] as X   Y	3.10	No
<a href="#">PEP 612</a>	Parameter Specification Variables	Proposes typing.ParamSpec and typing.Concatenate to support forwarding parameter types of one callable over to another callable	3.10	No
<a href="#">PEP 613</a>	Explicit Type Aliases	Formalizes a way to explicitly declare an assignment as a type alias	3.10	No
<a href="#">PEP 646</a>	Variadic Generics	Introduce TypeVarTuple, enabling parameterisation with an arbitrary number of types	3.11	No
<a href="#">PEP 647</a>	User-Defined Type Guards	Specifies a way for programs to influence conditional type narrowing employed by a type checker based on runtime checks	3.11	No
<a href="#">PEP 655</a>	Marking individual TypedDict items as required or potentially-missing	Two new notations: Required[], which can be used on individual items of a TypedDict to mark them as required, and NotRequired[]	3.11	No
<a href="#">PEP 673</a>	Self Type	Methods that return an instance of their class	3.10	No
<a href="#">PEP 675</a>	Arbitrary Literal String Type	Introduces supertype of literal string types: LiteralString	3.11	No

PEP 681	Data Class Transforms	Provides a way for third-party libraries to indicate that certain decorator functions, classes, and metaclasses provide behaviors similar to dataclasses	3.11	No
PEP 692	Using TypedDict for more precise kwargs typing	A new syntax for specifying kwargs type as a TypedDict without breaking current behavior	3.12	No
PEP 695	Type Parameter Syntax	A syntax for specifying type parameters within a generic class, function, or type alias. And introduces a new statement for declaring type aliases.	3.12	No
PEP 698	Override Decorator for Static Typing	Adds @override decorator to allow type checkers to prevent a class of bugs that occur when a base class changes methods that are inherited by derived classes.	3.12	No

## Underscores in Numeric Literals

Underscores in Numeric Literals are supported, even encouraged, but not required. For consistency, follow the grouping examples presented in the PEP abstract.

### PEP versions supported by CHIPSEC

PEP	Title	Summary	Python Version	Supported
PEP 515	Underscores in Numeric Literals	Extends Python's syntax so that underscores can be used as visual separators for grouping purposes in numerical literals	3.6	Yes

## Walrus Operator (:=)

At this time, Assignment Expressions (Walrus operator) are not supported.

### PEP versions supported by CHIPSEC

PEP	Title	Summary	Python Version	Supported
PEP 572	Assignment Expressions	Adds a way to assign to variables within an expression	3.8	No

## Deprecate distutils module support

Python 3.12 will deprecate and remove the distutils module. In order for CHIPSEC to support this and future versions of Python, setuptools should be used instead of distutils.

The setuptools module has been updated to fully replace distutils but requires an up-to-date version.

- Minimum setuptools version: [62.0.0](#) (requires Python  $\geq$  3.8)
- Recommended setuptools version: latest

**Note:** If you get any *setuptools.command.build* errors, verify that you have (at least) the minimum setuptools version.

### PEP versions supported by CHIPSEC

PEP / bpo	Title	Summary	Python Version	Supported
PEP 632	Deprecate distutils module	Mark the distutils module as deprecated (3.10) and then remove it (3.12)	3.12	Yes

## Sphinx Version

The versions of Sphinx that can be utilized to generate CHIPSEC's documentation are 6.X.X, 7.X.X and 8.X.X.

## Generating Documentation

Use the script in the docs folder to automatically generate CHIPSEC's documentation using Sphinx. It generates PDF plus either HTML or JSON formats.

```
python3 create_manual.py [format]
format - html or json
python3 create_manual.py
python3 create_manual.py html
python3 create_manual.py json
```

## References

- [Sphinx Apidoc](#)
- [Sphinx Build](#)
- [Autodoc](#)